



Data Protector Suite

Data Protector Suite 2022



IRI FieldShield
PII / PHI Classification & Masking



IRI DarkShield
Unstructured Data Search & Security



IRI CellShield
PII / PHI Search & Mask in Excel



IRI RowGen
Smart Test Data Generation

database
TRENDS AND APPLICATIONS

**TREND-SETTING
PRODUCTS**

IRI, The CoSort Company

Vendor Background

- Specializing in fast data management and data-centric security
- Privately owned and profitable since 1978
- Sales and support in more than 40 cities worldwide
- Organically grown, shared metadata and Eclipse IP stack
- Featured in: CIO Review (top GRC and Compliance vendors); DBTA; Gartner Market Guide to Data Masking Tools; and in the QY, Markets & Markets, and Research & Markets *forecast reports* on Data Masking, DB Security, Data Classification, Data Governance

IRI Data Masking Reference Customers & Partners

Most IRI data masking customers profile and protect PII in RDBs, flat files and Excel sheets on premise, or in the cloud. Recent engagements also involve NoSQL DBs, documents, images, and EDI and log files. Streaming and Hadoop data sources, plus faces, are also supported. Entities include:



Selected Recognitions of IRI in the Data Governance and Security Industry


- BARC Technology Map for Data Governance 2021 (IRI Voracity)
- [Bloor Research Test Data Management InBrief](#)
- CIO Applications: Top 25 GRC Technology Providers
- CIO Review: 20 Most Promising Compliance Technologies
- [Computerworld Germany](#) (IRI FieldShield)
- [DBTA: Trendsetting Products](#) (IRI DarkShield)
- Forrester Research Now Tech: Data Masking Q1'2021
- [Gartner Market Guide for Data Masking](#) (2017-2021)
- Global Data Governance Market Size & Analysis through 2026
- Global Data Masking Market Size & Forecast [verified 2020](#)
- Insight Partners - Data Classification Market to 2027
- Insight Partners - Test Data Management Market Outlook to 2027
- [Markets & Markets - Data Governance Market to 2024](#) - Visionary Leader
- [Markets & Markets - Data Masking Market Forecast to 2022](#)
- Outlook Series: The Case for Data Masking
- QY Research - Global Test Data Management Market to 2025
- Privacy & Data Security Law Journal
- Research & Markets - DB Security Market to 2022



Data Protector Suite

IRI FieldShield
PII / PHI Classification & Masking

IRI DarkShield
Unstructured Data Search & Security

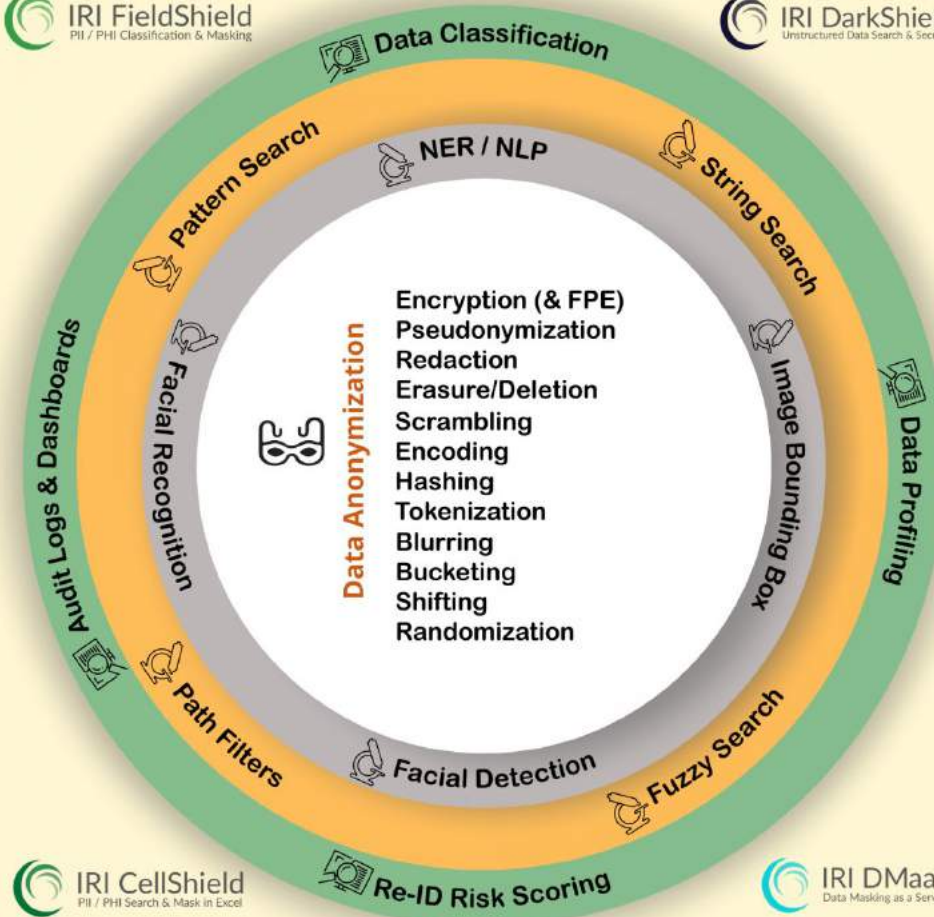


IRI CellShield
PII / PHI Search & Mask in Excel

IRI DMaaS
Data Masking as a Service

IRI Voracity
An Insatiable Appetite for Data

**TEST DATA
MANAGEMENT**

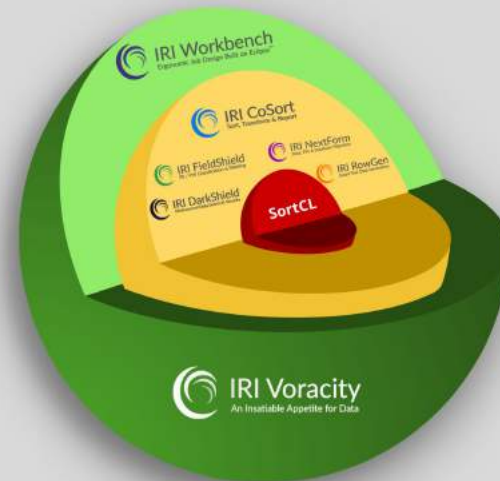

IRI
Total Data Management

IRI Data Manager Suite



IRI CoSort
Sort, Transform & Report

Speed or replace legacy sorts, and batch/ETL/SQL transforms

- Filter, sort, join, aggregate, pivot, cleanse, lookup, calc, etc.
- Map, migrate, federate, and replicate data from 150 sources
- Segment data, capture changes, report details / summaries
- Analyze changing dimensions, support complex transforms



IRI FACT
Fast Extract for DBs

Speed RDBMS unloads for archival, migration, reorg, and ETL

- Extract tables to flat files in parallel using SQL queries
- Convert and re-format to change data types and layouts
- Create the data definitions for IRI software and DB loads
- Pipe to CoSort and DB loaders for faster reorg and ETL



IRI NextForm
Data, File & Database Migration

Unlock data and move between apps, DBs, and platforms


- Convert, federate, remap, and replicate legacy data
- Migrate data between databases and create new tables
- Change file formats, data types, and endian conditions
- Find, extract, and structure data in unstructured sources



IRI RowGen
Smart Test Data Generation

Prototype DBs and ETL, stress-test, outsource, benchmark

- Use real data models and formats, not production data
- Combine generation and selection, create new formats
- Preserve referential integrity and frequency distributions
- Feed test DBs, files, and custom reports simultaneously

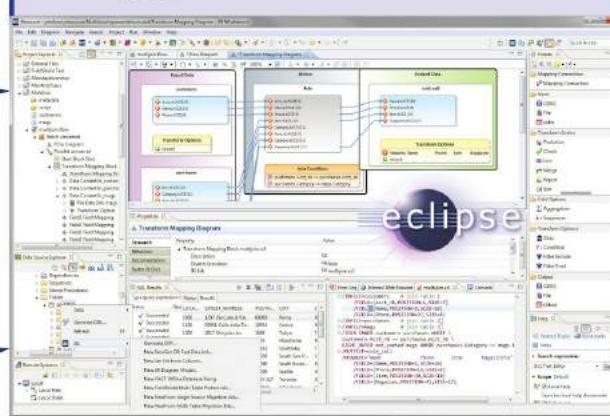

Consolidate tools and tasks to process, protect, prototype, present

- Discover, define, and manage data in legacy and new sources
- Combine data integration, migration, governance, and analytics
- Exploit CoSort or Hadoop engines for optimum throughput
- Leverage Eclipse familiarity, functionality, and extensibility



IRI
Total Data Management

© 2021 Innovative Routines International (IRI), Inc. All Rights Reserved.
CoSort, Voracity, NextForm, DarkShield, FieldShield, CellShield, and RowGen are trademarks or registered trademarks of IRI. FACT is a trademark of DataStreams Corp. All other product, brand, or company names may be (registered) trademarks of their respective holders.

IRI Data Protector Suite



IRI FieldShield
PII / PHI Classification & Masking

Static and dynamic masking of structured data sources

- Search, profile, and classify sensitive data in DBs and files
- Encrypt, hash, redact, pseudonymize, randomize, tokenize
- Apply cross-table rules to save time and referential integrity
- Score re-ID risk and audit your jobs to verify compliance



IRI CellShield
PII / PHI Search & Mask in Excel

Discover and de-identify PAN/PHI/PII in Excel spreadsheets

- Define or re-use patterns to search for sensitive data
- Locate, report, and open all found ranges in the LAN
- Click to encrypt, mask, or pseudonymize data directly
- Auto-log protections to verify privacy law compliance



IRI DarkShield
Unstructured Data Search & Security

Discover, deliver, and delete sensitive information everywhere

- Find PII in LAN and cloud sources using multiple methods
- Simultaneously de-identify, remove, or report those values
- Mask text, MS, PDF, Parquet & image files + LOBs & NoSQL
- Comply with the right to erasure, portability, or rectification



IRI DMaaS
Data Masking as a Service

Leverage expert data privacy engineers to find and mask PII

- Avoid learning curves, software expenses and staff diversion
- Reduce risk by agreement, monitored VPN, or secure cloud
- Use operational logs for reporting and compliance audits
- Select from competitive hourly, daily or project rates

Sources



Call Detail Records
ASN.1 BER, JER, OER, PER, XER



Files
COBOL, CSV, Fixed, LDIF, LS-RS-VS, MF-ISAM, MFVL, Pipes, VB, Vision, XML, etc.

Mainframe
Adabas, Datacom, IDMS, IMS, ISAM, Pick, Unidata, VSAM, etc.



Images
BMP, DICOM, GIF, JPG, PNG, TIFF

Other Sources
Custom Apps, ETL/ELT Tools, Packaged Apps, Web Logs

DISCOVER

Data Classification
Dark Data Search
DB & File Search
DB & File Profiling
ER Diagramming
Metadata Definition
Metadata Forensics

INTEGRATE

Slowly Changing Dimensions
Public/Private Mashups
Change Data Capture
Fast DB Un/Load
Data Federation
One-Pass ETL

MIGRATE

Incremental Replication
Data & File Types
Endianness
Databases
JCL Sorts
ETL Jobs

GOVERN

Data Quality
Data Masking
DB Subsetting
Re-ID Risk Scoring
Data Reconciliation
Test Data Synthesis
Data & Metadata Lineage

ANALYZE

IoT Feeds
Embedded BI
Data Wrangling
Cloud Dashboard
Predictive Analytics
Clickstream Analytics
In Datadog, KNIME & Splunk

DESIGN

Wizards with Rules
Graphical Dialogs
Scripts with Outlines
Metadata Form Editors
Workflow/Mapping Diagrams
DataSwitch No-Code
Erwin Mapping Manager

DEPLOY

CoSort CLI/API
MapReduce 2 (Grid)
Spark (In-Memory)
Storm (Streaming)
Tez (Batch)
CD/CD, Java, SQL, YARN
Eclipse or Any Scheduler

Targets



Custom Reports
Detail & summary reports




Files
ASN.1, COBOL, CSV, Fixed, JSON, LDIF, LS-RS-VS, MF-ISAM, MFVL, Parquet, VB, Vision, XLS/X, XML

Other Targets
Custom Apps, Data & SpreadMarts, ETL/ELT Tools, Federated Views, Packaged Apps, DB Clones, DevOps



IRI Data Masking Tool Architectures

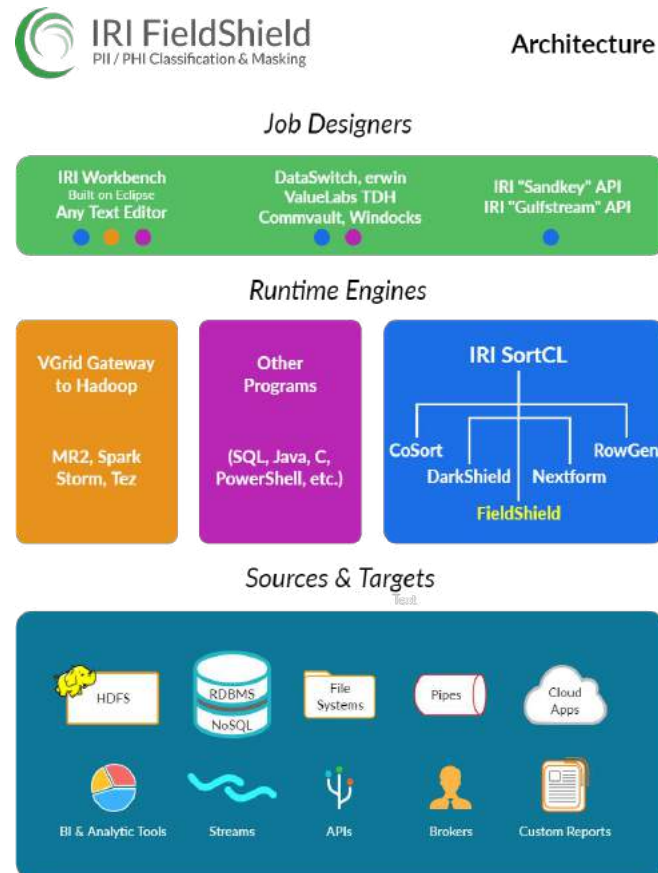


Both structured and unstructured data discovery functions -- including classification, search, and metadata creation -- are performed in IRI Workbench data discovery wizards.


Static data masking (SDM) jobs are usually built in IRI Workbench, while user-specific dynamic data masking (DDM) is available in multiple options (see matrix on slide #27).

Voracity data manipulation and masking jobs use the IRI CoSort (SortCL) engine on commodity LUW hardware, on premise or in the cloud. No database or cloud API is needed. This reduces runtime overhead, administrative complexity, and risk. The executable is also metadata-compatible with, and masks within data integration, cleansing, and reporting jobs, too.

Finally, no server framework is required to orchestrate jobs. This fosters more granular allocation and tuning of resources, and the sharing of metadata artifacts.

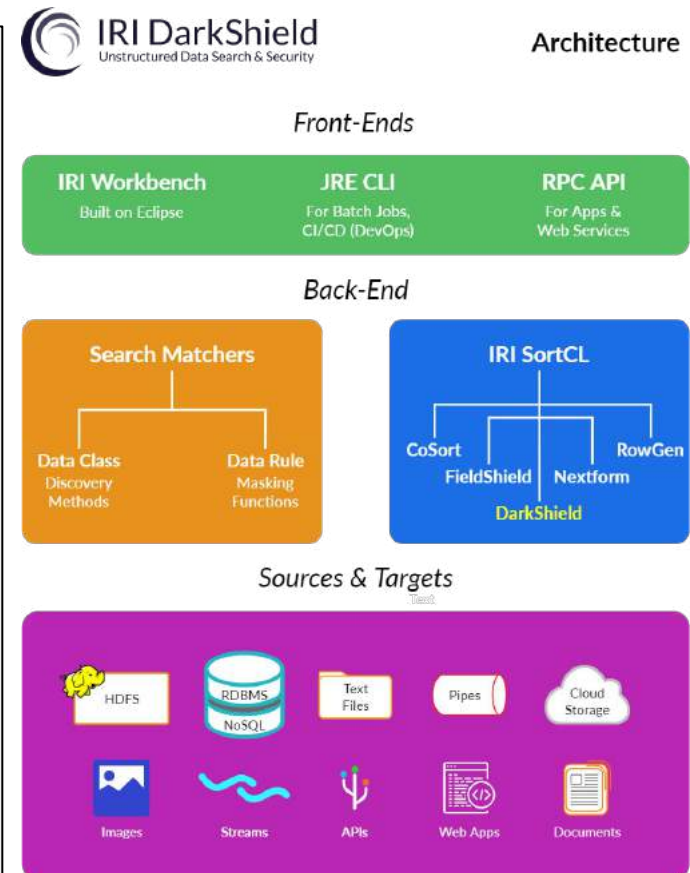


IRI Voracity Communication & Networking Architecture

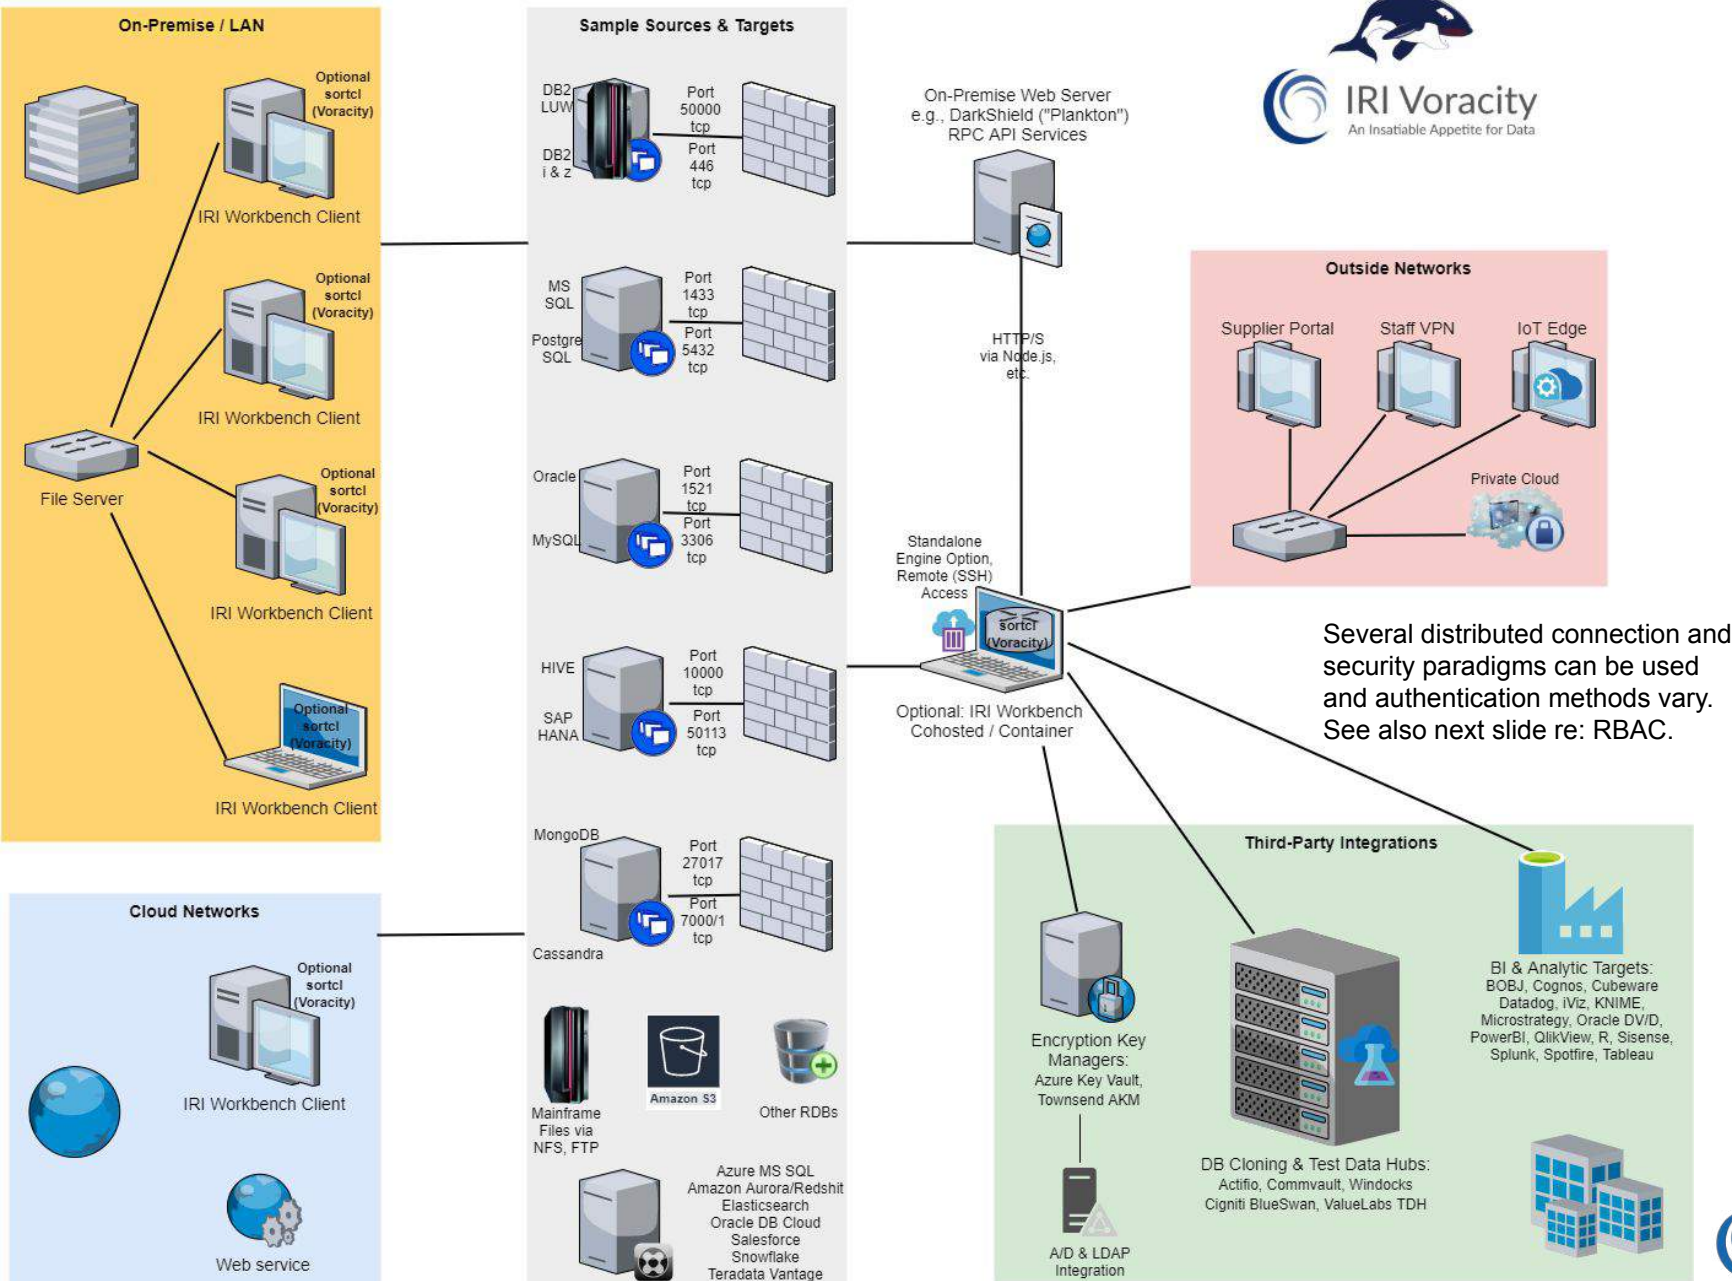


IAM/RBAC Now & Later

Today, you can assign permissions via [encryption keys](#) for select decryption, and: to data (file) sources, IRI masking programs (sortcl.exe), and the scripts they run (spec.fcl) in LUW file systems using central LDAP/AD settings. You can optionally control them via Apache Directory Studio in IRI Workbench:

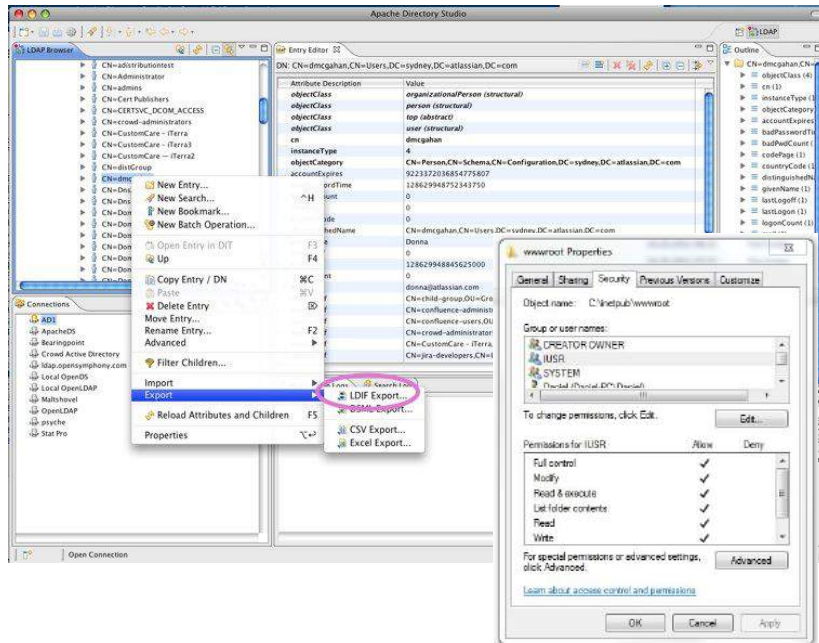


Soon, the IRI client/server governance system illustrated on the right will all you to assign and enforce RBACs to the same elements above, **and** to more granular elements like field names (mapped from data classes), functions, and perhaps specific data values (or ranges of values).

IRI Workbench Client

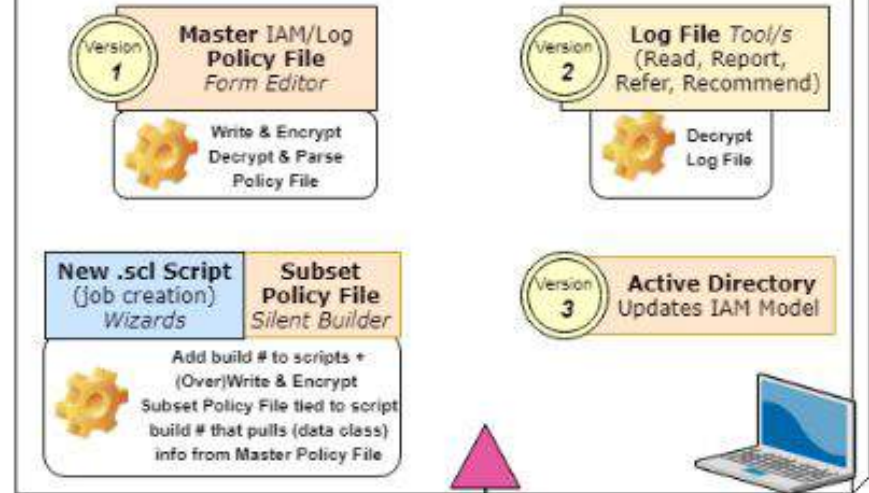




Production (Remote) Server

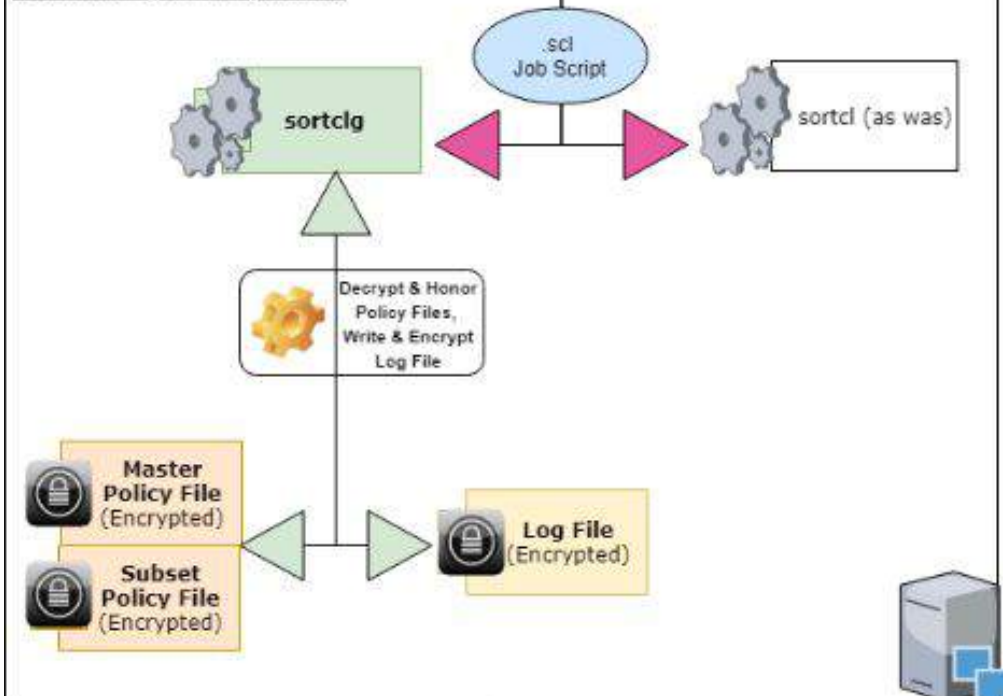

Cloud Data & Systems Support

FieldShield can read/mask/write data in cloud DBs like Oracle 19c, Snowflake, MS SQL in Azure, AWS Redshift, etc. via J/ODBC, *plus* URLs & message queues.

DarkShield supports files in S3, GCP and Azure Storage, plus any RDB, 9 NoSQL DBs, and SMB-tied cloud drives like Dropbox and Sharepoint. **Both** operate on-premise or in the cloud, on bare metal shapes or VMs running Windows, Linux or Unix.

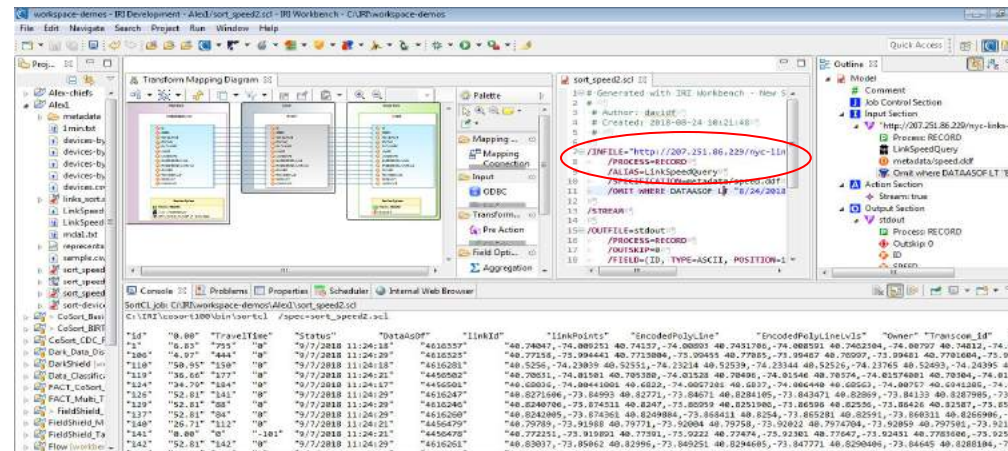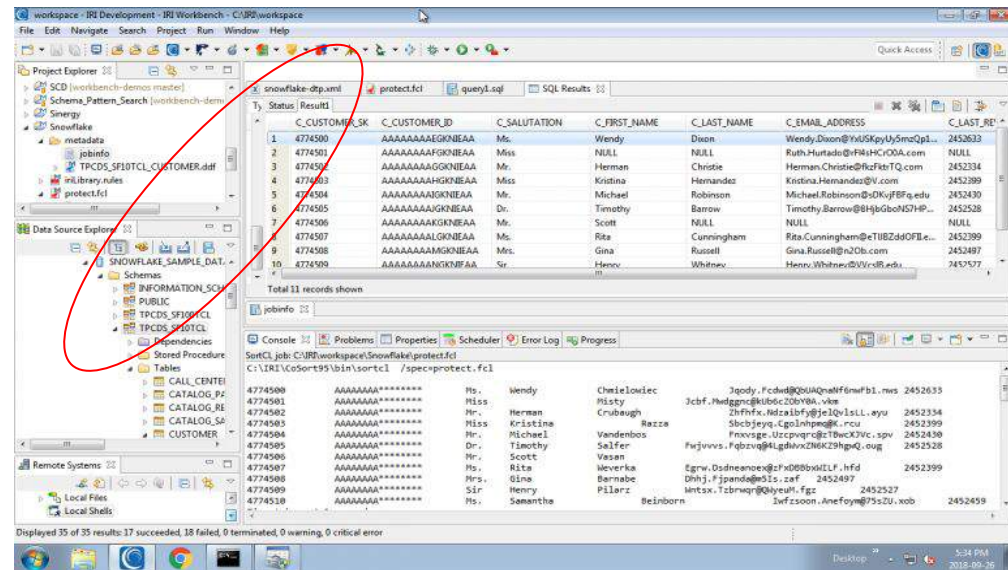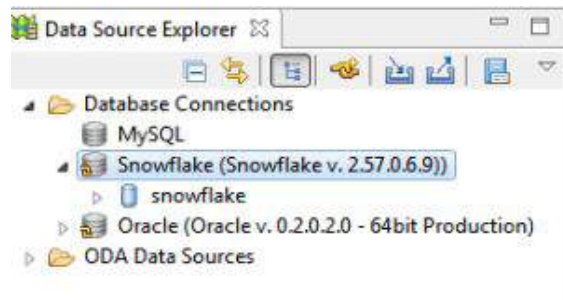

Metadata Integrations


1. Voracity tooling *consumes* metadata from any structured source for data classification, profiling, search, de-ID, ETL etc.
2. FieldShield & RowGen job scripts also *produce* metadata for several **DB load utilities** in multi-DB masking & test data jobs.
3. Their data definition file metadata can also be *exported* (e.g. target field layouts) in CSV for catalog tools like **Collibra**.
4. DarkShield reads **attribute** metadata about source files, and produces artifactual metadata from its search and mask ops and it can auto-forward or populate Splunk ES with that information for analysis, dashboarding, or adaptive responses.
5. **MIMB**, **erwin**, **DataSwitch** and **ValueLabs TDH** hub and feed FieldShield DDF and .FCL specs from external metadata:

Bridge Mapping

Meta Integration Repository (MIR) Metamodel (based on the OMG CWM standard)	"IRI CoSORT SortCL Data Definition File" Metamodel IriCoSort	Mapping Comments
Attribute	/FIELD	
Comment		# Comments in the DDF file
Description		# Comments in the DDF file
Name	field name (if physical name is not specified)	
PhysicalName	field name	
Position		
DataType	Data Type name	
Length	Field length	
Scale	Field scale	

Source Table Name	Source Column Name	Source Column Data Type	Source Column Length	Business Role	Target System Name	Target Environment Name	Target Table Name	Target Column Name	Target Column Data Type
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int
AdventureWorks	AdventureWorks	int	4		AdventureWorks	AdventureWorksDW2008R2	AdventureWorksDW2008R2	AdventureWorksDW2008R2	int

6. All IRI metadata -- including data source/target layouts, job/task speci and batch files, workflows and metamodels, discovery configurations, search matchers and masking rules -- can also be team shared, secured and version controlled in **Git** et al

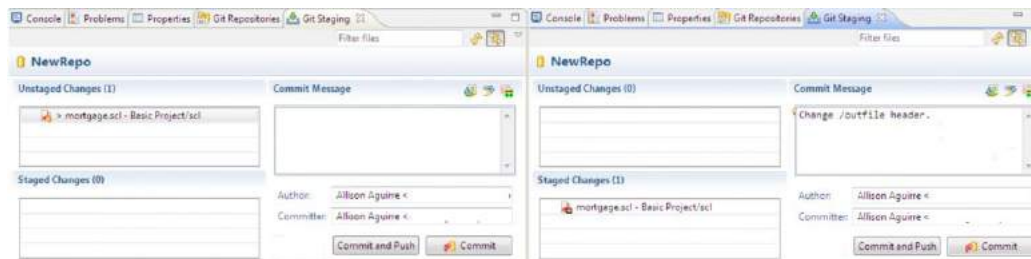

Data Sources (Standard)

Acucobol (MF) Vision	ESDS	MF- & RM-ISAM	Tibero (FACT)
Altibase (FACT)	Excel	MF Var. Length	Teradata
ASN.1 CDRs	HL7 (DS)	MySQL	Text
C-ISAM	HSQLDB (WB)	Oracle	TSV
CLF web logs	IDX 3, 4 & 8	PDF (DS)	UTF-8 & 16
CSV	Informix	PostgreSQL	Variable Block
DB2 (UDB)	Ingres	Record Sequential	Variable Sequential
DB2 for i5/OS	LDIF	RTF (WB)	VSAM MVS (UniKix)
DB2 for z/OS	JSON	SQL Anywhere	Web Services
Delimited	Line Sequential	SQL Server	Word (DS)
Derby (WB)	MariaDB	SQLite	X12 (DS)
ELF web logs	MaxDB	Sybase ASA/E & IQ	XML

FACT: requires IRI Fast Extract (FACT) **DS:** requires IRI DarkShield
WB: requires IRI Workbench, the free Eclipse GUI for FieldShield, etc.

Data Sources (Legacy)

Access	D3	GA-Power 95, R91	K-ISAM	Pathway	RMS
Adabas	Datacom	Gemstone	Knowledgeman	PDS	Reality/X
Advanced Pick	Dataflex	GENESIS	KSDS	PervasiveSQL	RRDS
ALLBASE	Db4o	Gigabase	Lotus	Pick/Pick64+	Sequoia
Alpha5	dBase	H2	Manman	PI-Open	SFS (VS*)
Amazon RDS	Desktop Adapter	IDMS	Mentor / pro	Powerflex	Sharebase
Azure	DL/1	IDS	MO	Powerhouse	Supra
BizTalk	DSM	Image	Model 204	Progress	Terracotta
Cache	Enscribe	IMS	Mumps	QueryObject	Total
Clipper	Enterprise Adapter	Interbase	MyBase	rBase	Ultimate
Codasyl	FileMaker	Intersystems	Netezza	R83	UltPlus
CorVision	Firebird	ISM	NonStop SQL	Rdb	Unidata
ConceptBase	Focus	Jasmine	ObjectStore	REALITY	Universe
D-ISAM	FoxPro	JBase	Paradox	Red Brick	VSAM VSE

These sources are typically only accessible via IRI partner (SoftwareAG-CONNx) J/ODBC drivers.

**IBM/Encina SFS files should be supported when written in COBOL using RECORDING MODE IS VARIABLE*

Data Sources (Modern)

Amazon EMR Hive	DynamoDB	Redis & Solr	Parquet files
Amazon RDS	ElasticSearch	MarkLogic (XML)	Pivotal Greenplum
Apache Cassandra	Google BigQuery	MongoDB	Pivotal HD Hive
Apache Hadoop Hive	Google BigTable	MS Dynamics CRM	SAP HANA
Azure CosmosDB	Hortonworks Hive	MS SQL Azure	Salesforce.com
Cloudera CDH Hive	Hubspot	Oracle Eloqua	Snowflake DB
Cloudera Impala	Kafka Connect	Oracle Cloud DB	Spark SQL
Database.com	MapR Hive	Netezza	Vertica DB

IRI FieldShield finds and masks structured RDB data on-premise, or in HDFS, AWS, Azure, GCP or OCI, **plus**: data in flat files (which can also be in S3 buckets or Hadoop), as well as ASN.1 CDRs, MF-ISAM or Vision files, and Excel sheets.

IRI DarkShield supports RDB and flat file data, too, **plus**: semi- and unstructured data in static or streaming text, log and EDI formats like JSON, HL7, X12 and XML; C/LOB columns in RDBs; Excel, PDF, and Word documents (including PII in their embedded images); NoSQL DBs; and, image files (BMP, DICOM, GIF, JPG, PNG and TIFF). The DarkShield API can run on premise or in the cloud, and read/mask/write PII from/to files in AWS S3 buckets, Azure BLOB, GCP Storage, or SharePoint (OneDrive). **IRI CellShield** only supports Excel (XLS/X), and works inside Excel, on-premise or in Office 365.




IRI FieldShield
PII / PHI Classification & Masking

IRI Data Protector Suite

Sensitive Data Classification and Search Wizards

To facilitate data masking, IRI FieldShield includes: PII definition (cataloging through data classes); discovery through string (literal or dictionary), pattern, and fuzzy-logic searches; statistical reporting; and, automatic metadata creation.


Fit-for-purpose GUI wizards deliver:

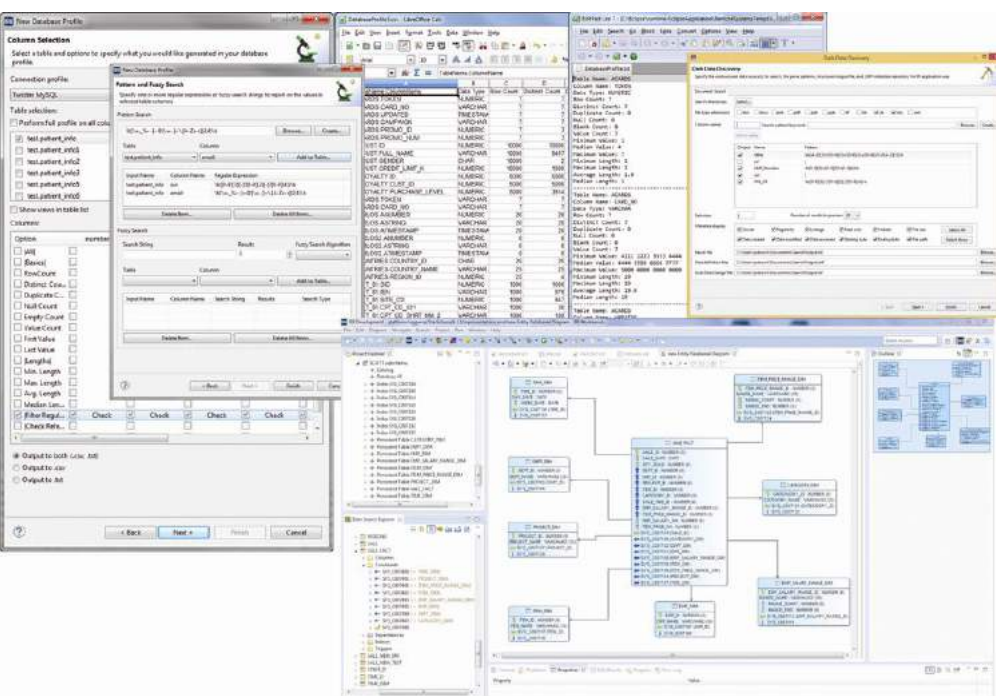

- DB and file data classification, with search and masking rule matchers
- DB profiling, ERDs, and table searches
- Flat-file profiling and value searches
- Data class searches through schema and directories for bulk discovery
- Metadata discovery and definition
- Dark data search and structuring, with metadata reporting (see DarkShield)

Search Result Reports, Dashboards & Exports

In addition to report-formatted and machine-readable outputs from PII search operations in IRI Workbench, FieldShield users can also see details at a glance in digital displays, or feed that data to tools like Splunk Enterprise Security and Datadog for analytics and action-taking:

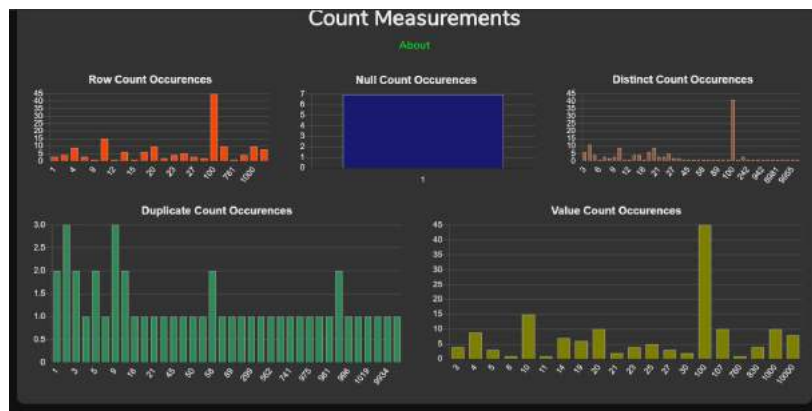

Multiple Masking Job Design Options


IRI FieldShield and other Voracity data masking, cleansing, transformation, migration, reporting, and wrangling jobs can be created and run *inside or outside* of IRI Workbench.

Job design methods supported *inside*:

- 1) Job creation wizards
- 2) Color-coded syntax-aware job script editor with outline
- 3) Form Editors
- 4) Graphical parameters Dialogs
- 5) Mapping Diagrams

Job design methods supported *outside*:

- 6) DataSwitch No-Code Web App
- 7) erwin Mapping Manager
- 8) Value Labs Test Data Hub
- 9) Any external text editor
- 10) 3GL app (system or API calls)

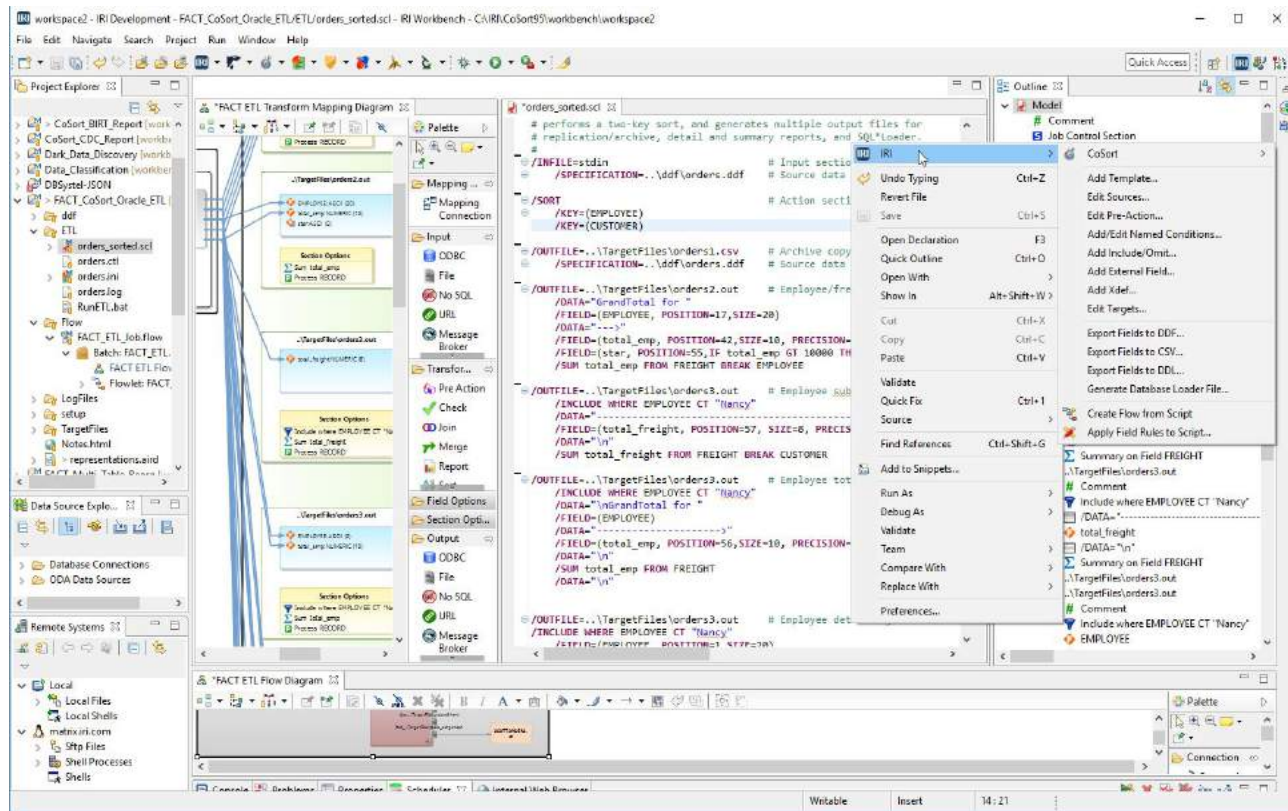




IRI Voracity


An Insatiable Appetite for Data

Static Data Masking Workflows

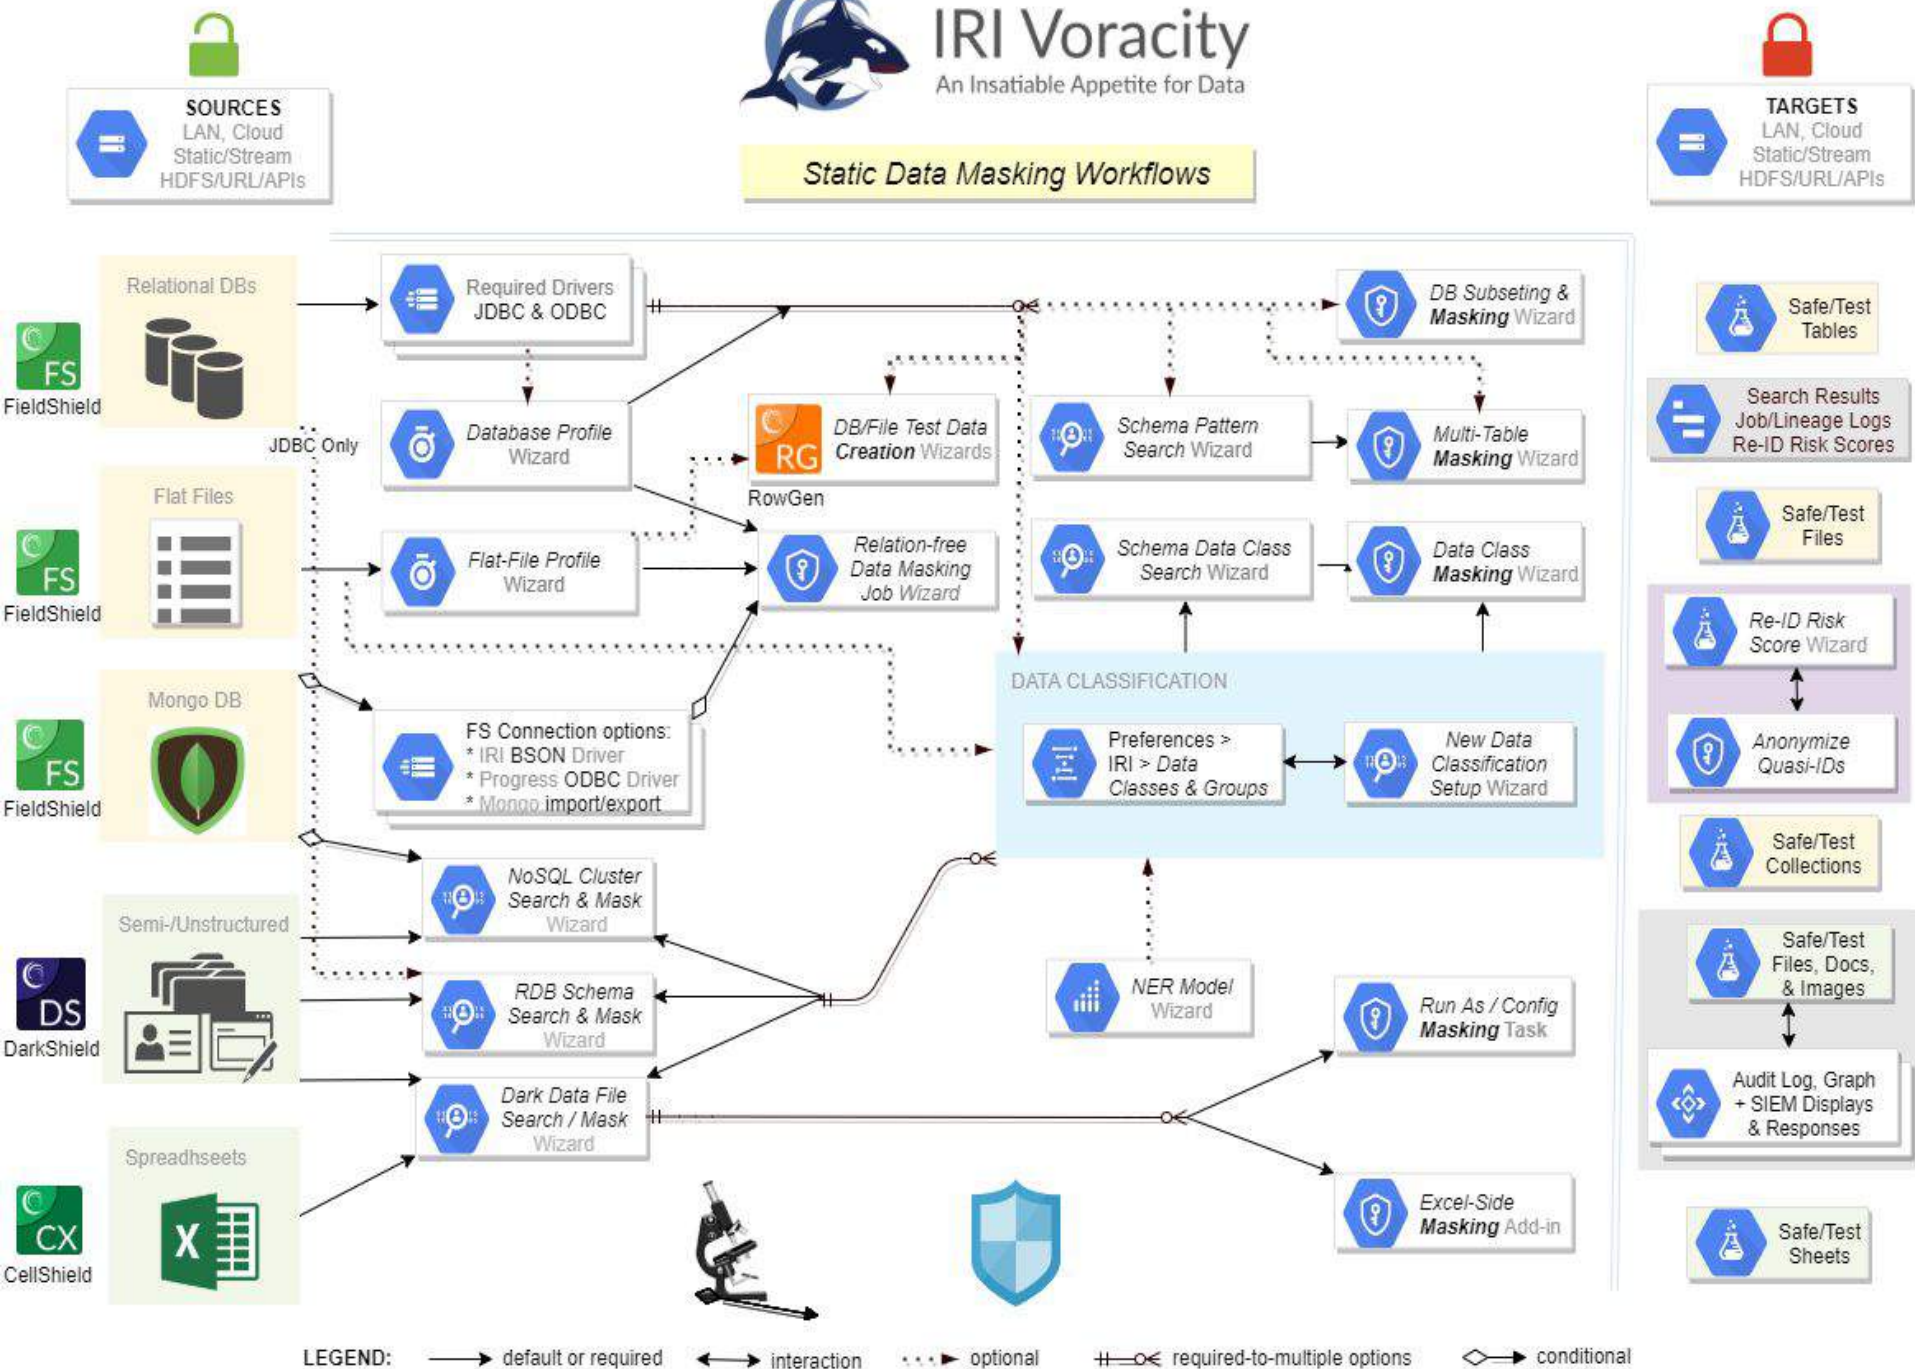

And Multiple Job Deployment Options

- 1) 4GL scripts on the command line or in batch
- 2) From 3rd party automation tools like Stonebranch UAC, cron, etc.
- 3) Directly from KNIME in Eclipse, or a Splunk add-on app, *as you report or index*
- 4) Some jobs run without code changes in Hadoop via MR2, Spark, Spark Stream, Storm or Tez
- 5) Use graphical run configuration dialogs or the built-in task scheduler to launch local, remote, or HDFS jobs from IRI Workbench
- 6) System or API calls from 3GL programs or web services
- 7) Value Labs Test Data Hub, Cigniti, GitLab, Azure DevOps, Amazon CodePipeline
- 8) Actifio, Commvault & Windocks cloning tools for virtualized DB images / containers
- 9) DataSwitch no-code data engineering app

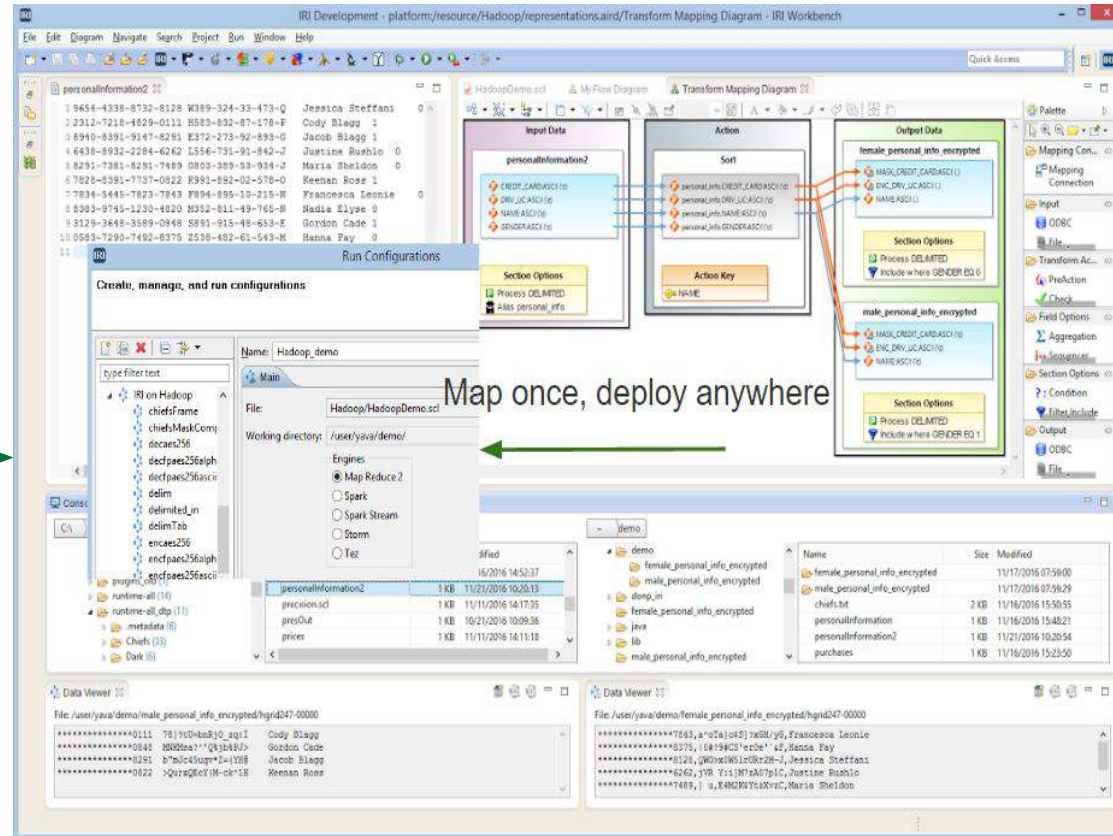


Static Data Masking Functions (1-3 of 15)

Character Scrambling




- For ASCII data
- Less secure
- Reversible

Encoding / Decoding

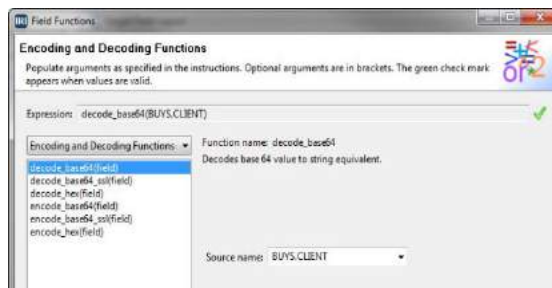


- Converts binary to ASCII
- Supports base64 & hex
- Reversible

Encryption / Decryption

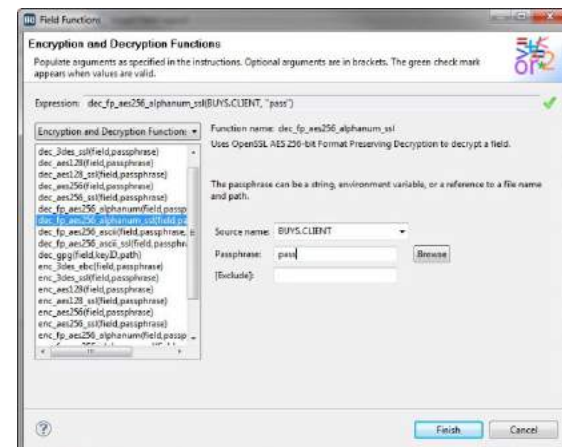

- 3DES EBC & SSL
- AES-128 & -256 CBC
- AES-256 Format-Preserving
- GPG (PGP-compatible)
- FIPS-compliant OpenSSL
- Custom

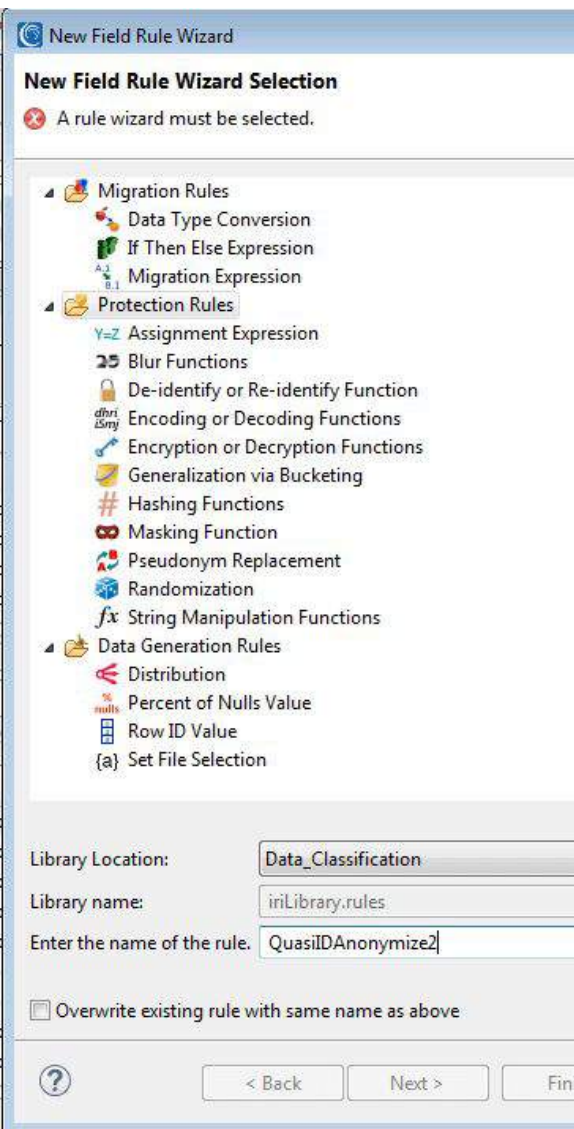

Static Data Masking Functions (4-6 of 15)

Pseudonymization

Pseudonym Replacement

Create a pseudonym field that will use values in a set file as substitutes for the original field's values.

Pseudonymize field:

☒ Use provided pseudonym list (non-recoverable)
 Name options: PseudoSetPage_grpPseudoFiles=Pseudonym Files
 Name type:
 Sex:
 Order:
 Default pseudonym list file:
☐ Use only unique names from pseudonym list
 (Blanks inserted when # of records is greater than # of unique names)

☐ Use your own pseudonym list (non-recoverable)
 User pseudonym list
 Pseudonym list file:
☐ Use original field as a look-up into pseudonym list
☒ Use random draw from pseudonym list
☐ Use only unique names from pseudonym list
 (Blanks inserted when # of records is greater than # of unique names)

- Provides realistic names
- Reversible lookup values
- Non-reversible selection

Redaction / Obfuscation

Masking Function

Replaces a range of characters in the required source field with a replacement character.

Source field:

☒ Use predefined masks
 Predefined Masks
 Mask Example: {0}123456789 => *****
 Mask:

☐ Define mask
 Arguments:
 Mask character ("*" by default):
 Start position:
 Length:

Type	Value

- Partial/full-field masking
- Conditional omission
- Non-reversible

Randomization

Random Value Generation

Randomly generate a new value for this field.

Derived field name:


☒ Generate random value
 Random value options
 Type:
 Random Min Size:
 Random Max Size:

☐ Random selection from a set file
 Set file
 File:

- Random data generation
- Random data selection
- Non-reversible


Static Data Masking Functions (7-15 of 15)

Hashing

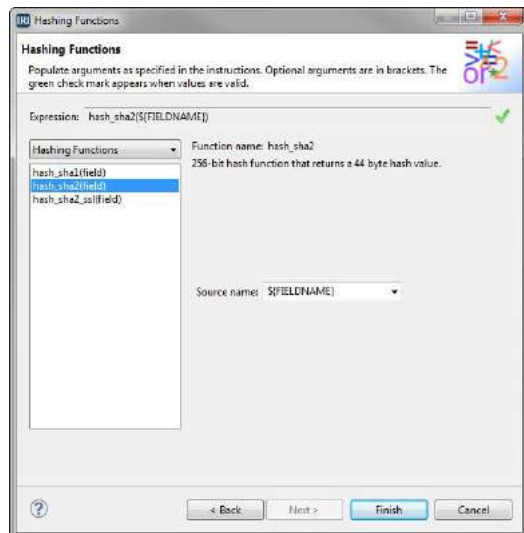


- SHA-1 & 2 cryptographic
- Returns hash of fieldstring
- Use for integrity checking

Expression Logic

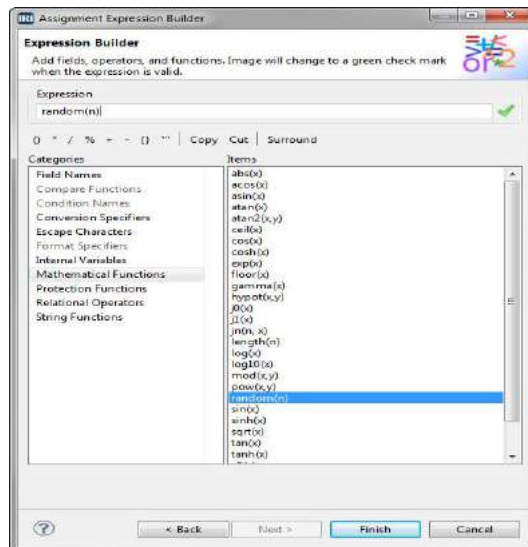

- Mathematical operations
- PCRE logic
- Custom blurring

String Manipulations

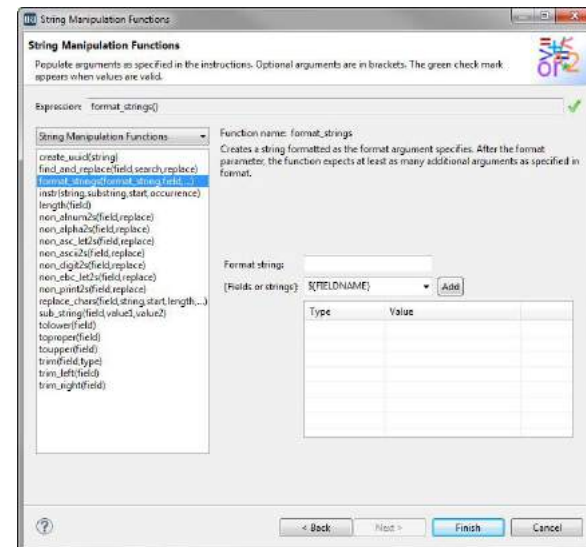

- Find, replace, and add
- Reposition and trim
- Use INSTR information

Blurring & Bucketing

Add random “noise” (perturbate) to ages/dates, **and** generalize (anonymize) quasi-identifiers

Tokenization

DB-value substitute for PCI DSS

Deletion & Suppression

Erasure for GDPR Right to Be Forgotten

Custom Functions

User's field-level call

Re-ID Risk Determination


New Re-ID Risk Scoring

Attributes
Select the type of each attribute.

Name	Type
sex	Quasi-Identifying
age	Quasi-Identifying
race	Insensitive
marital-status	Sensitive
education	Quasi-Identifying
native-country	Identifying
workclass	Insensitive
occupation	Insensitive
salary-class	Sensitive

< Back **Next >** **Cancel**

US HIPAA and FERPA regulations require that patient and student data sets used in research or marketing have a statistically certified “very small” chance of being re-identifiable.

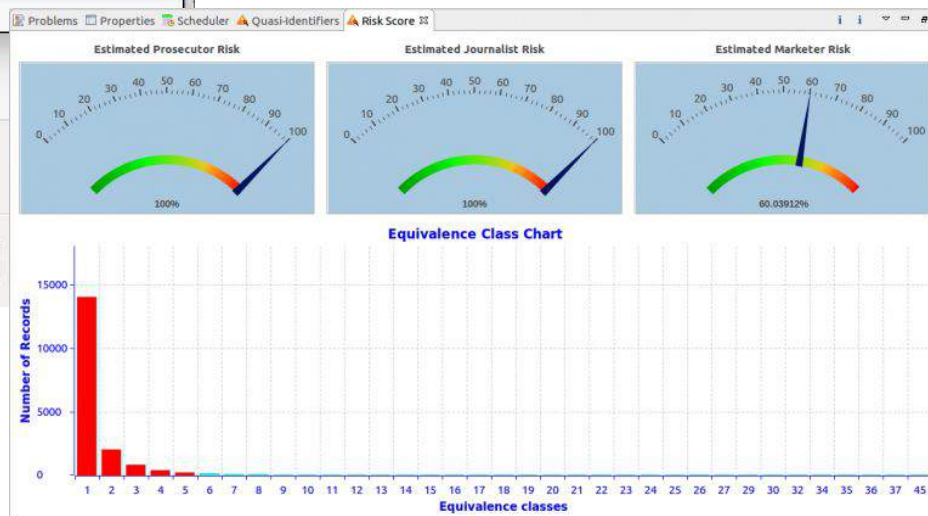

- IRI risk scoring wizard produces re-ID probability scores in 3 modes
- Analyzes quasi-identifiers with multiple, peer-reviewed functions
- Detail and graphed scoring reports

Query-Ready XML Audit Log

The screenshot displays the IRI Workbench interface, which is used for developing and managing FieldShield data. The main window shows the XML audit log for the file `FSlog.xml`, which is located in the `FieldShield_Table_File\scl` directory. The XML log contains detailed information about the data processing, including the product, version, serial, operating system, user, process ID, terminal, program, command, start and end times, run time, return code, error message, and the number of records processed.

The XML log content is as follows:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<AuditTrail>
  <AuditRecord>
    <Product>CoSort</Product>
    <Version>9.5.3</Version>
    <VersionTag>R95140122-1600</VersionTag>
    <Serial>99999.demo</Serial>
    <OperatingSystem>Windows 7</OperatingSystem>
    <User>IRIDEMO</User>
    <ProcessId>1396</ProcessId>
    <Terminal>console</Terminal>
    <Program>sortcl</Program>
    <Command>/spec=patient_enc.scl </Command>
    <StartTime>2014-02-20 13:31:49</StartTime>
    <EndTime>2014-02-20 13:31:54</EndTime>
    <RunTime>00:00:05</RunTime>
    <ReturnCode>0</ReturnCode>
    <ErrorMessage>normal return</ErrorMessage>
    <RecordsProcessed>10</RecordsProcessed>
  </AuditRecord>
</AuditTrail>
</Script>
```

The Properties window shows the following details for the `FSlog.xml` file:

Resource	Property	Value
FSlog.xml	Info	
	derived	false
	editable	true
	last modified	December 21, 2015 at 9:27:50 AM
	linked	false
	location	C:\IRI\CoSort95\workbench\workspace\FieldShield_Table_File\scl\FSlog.xml
	name	FSlog.xml
	path	/FieldShield_Table_File\scl\FSlog.xml
	size	45,058 bytes

MongoDB Masked

unmasked

The screenshot displays the IRI Workbench interface with a MongoDB database connection. The left sidebar shows the Project Explorer with various files and folders. The main window is divided into several panes:

- Document List:** A table showing masked data for the 'chiefs' collection. The columns are 'id', 'president', 'party', and 'state'. The data is masked with hexadecimal strings.
- chefsout.scl:** A script for generating a sort job. It includes fields for 'president', 'party', and 'state' and uses the 'chefsreport.json' output file.
- Terminal:** A terminal window showing the execution of the 'chefsreport.json' script. It displays the unmasked data for the 'chefs' collection, including fields like 'id', 'president', 'party', 'state', 'term', and 'start'.
- Outline:** A pane showing the structure of the 'chefsreport.json' file, including sections for 'Model', 'Comment', 'Job Control Section', 'Input Section', 'Action Section', and 'Output Section'.

A red arrow points from the 'unmasked' text to the 'chefsout.scl' script. A green arrow points from the 'MongoDB Masked' text to the 'Document List' table.

Document List (Masked Data):

id	president	party	state
1756f8b6b981b84000801	Adams, John	FED	MA
1756f8b6b981b84000802	Adams, John Quincy	D-R	MA
1756f8b6b981b84000803	Arthur, Chester A.	REP	VT
1756f8b6b981b84000804	Buchanan, James	DEM	PA
1756f8b6b981b84000805	Bush, George H.W.	REP	TX
1756f8b6b981b84000806	Bush, George W.	REP	TX
1756f8b6b981b84000807	Carter, James E.	DEM	GA
1756f8b6b981b84000808	Cleveland, Grover	DEM	NJ
1756f8b6b981b84000809	Cleveland, Grover	DEM	NJ
1756f8b6b981b8400080a	Clinton, William J.	DEM	AR
1756f8b6b981b8400080b	Coolidge, Calvin	REP	VT
1756f8b6b981b8400080c	Eisenhower, Dwight D.	REP	TX
1756f8b6b981b8400080d	Fillmore, Millard	WHG	NY
1756f8b6b981b8400080e	Ford, Gerald R.	REP	NB
1756f8b6b981b8400080f	Garfield, James A.	REP	OH
1756f8b6b981b84000810	Grant, Ulysses S.	REP	IL
1756f8b6b981b84000811	Harding, Warren G.	REP	OH
1756f8b6b981b84000812	Harrison, Benjamin	REP	OH
1756f8b6b981b84000813	Harrison, William Henry	VA	VA
1756f8b6b981b84000814	Hayes, Rutherford B.	REP	OH
1756f8b6b981b84000815	Hoover, Herbert C.	REP	IA
1756f8b6b981b84000816	Jackson, Andrew	DEM	SC
1756f8b6b981b84000817	Jefferson, Thomas	D-R	VA

Terminal (Unmasked Data):

```

db.chiefsmask.find()
{ "_id": "ObjectId('5afd796b8f6b981a300000c1')", "president": "Adams, John", "party": "FED", "state": "MA", "term": { "start": 1797, "end": 1801 }, "start": 1797, "end": 1801 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c2')", "president": "Adams, John Quincy", "party": "D-R", "state": "MA", "term": { "start": 1825, "end": 1829 }, "start": 1825, "end": 1829 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c3')", "president": "Arthur, Chester A.", "party": "REP", "state": "VT", "term": { "start": 1881, "end": 1885 }, "start": 1881, "end": 1885 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c4')", "president": "Buchanan, James", "party": "DEM", "state": "PA", "term": { "start": 1857, "end": 1861 }, "start": 1857, "end": 1861 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c5')", "president": "Bush, George H.W.", "party": "REP", "state": "TX", "term": { "start": 1989, "end": 1993 }, "start": 1989, "end": 1993 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c6')", "president": "Bush, George W.", "party": "REP", "state": "TX", "term": { "start": 2001, "end": 2005 }, "start": 2001, "end": 2005 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c7')", "president": "Carter, James E.", "party": "DEM", "state": "GA", "term": { "start": 1977, "end": 1981 }, "start": 1977, "end": 1981 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c8')", "president": "Cleveland, Grover", "party": "DEM", "state": "NJ", "term": { "start": 1885, "end": 1889 }, "start": 1885, "end": 1889 },
{ "_id": "ObjectId('5afd796b8f6b981a300000c9')", "president": "Cleveland, Grover", "party": "DEM", "state": "NJ", "term": { "start": 1893, "end": 1897 }, "start": 1893, "end": 1897 },
{ "_id": "ObjectId('5afd796b8f6b981a300000ca')", "president": "Clinton, William J.", "party": "DEM", "state": "AR", "term": { "start": 1993, "end": 1997 }, "start": 1993, "end": 1997 },
{ "_id": "ObjectId('5afd796b8f6b981a300000cb')", "president": "Coolidge, Calvin", "party": "REP", "state": "VT", "term": { "start": 1923, "end": 1927 }, "start": 1923, "end": 1927 },
{ "_id": "ObjectId('5afd796b8f6b981a300000cc')", "president": "Fillmore, Millard", "party": "REP", "state": "TX", "term": { "start": 1953, "end": 1957 }, "start": 1953, "end": 1957 },
{ "_id": "ObjectId('5afd796b8f6b981a300000cd')", "president": "Ford, Gerald R.", "party": "WHG", "state": "NY", "term": { "start": 1850, "end": 1854 }, "start": 1850, "end": 1854 },
{ "_id": "ObjectId('5afd796b8f6b981a300000ce')", "president": "Garfield, James A.", "party": "REP", "state": "NB", "term": { "start": 1973, "end": 1977 }, "start": 1973, "end": 1977 },
{ "_id": "ObjectId('5afd796b8f6b981a300000cf')", "president": "Grant, Ulysses S.", "party": "REP", "state": "OH", "term": { "start": 1881, "end": 1885 }, "start": 1881, "end": 1885 },
{ "_id": "ObjectId('5afd796b8f6b981a300000d0')", "president": "Harding, Warren G.", "party": "REP", "state": "IL", "term": { "start": 1869, "end": 1873 }, "start": 1869, "end": 1873 }

```

chefsreport.json (Unmasked Data):

```

{
  "president": "Adams, John",
  "term": {
    "start": 1797,
    "end": 1801
  },
  "party": "FED",
  "state": "MA"
},
{
  "president": "Adams, John Quincy",
  "term": {
    "start": 1825,
    "end": 1829
  },
  "party": "D-R",
  "state": "MA"
},
{
  "president": "Arthur, Chester A.",
  "term": {
    "start": 1881,
    "end": 1885
  },
  "party": "REP",
  "state": "VT"
},
{
  "president": "Buchanan, James",
  "term": {
    "start": 1857,
    "end": 1861
  },
  "party": "DEM",
  "state": "PA"
},
{
  "president": "Bush, George H.W.",
  "term": {
    "start": 1989,
    "end": 1993
  },
  "party": "REP",
  "state": "TX"
},
{
  "president": "Bush, George W.",
  "term": {
    "start": 2001,
    "end": 2005
  },
  "party": "REP",
  "state": "TX"
},
{
  "president": "Carter, James E.",
  "term": {
    "start": 1977,
    "end": 1981
  },
  "party": "DEM",
  "state": "GA"
},
{
  "president": "Cleveland, Grover",
  "term": {
    "start": 1885,
    "end": 1889
  },
  "party": "DEM",
  "state": "NJ"
},
{
  "president": "Cleveland, Grover",
  "term": {
    "start": 1893,
    "end": 1897
  },
  "party": "DEM",
  "state": "NJ"
},
{
  "president": "Clinton, William J.",
  "term": {
    "start": 1993,
    "end": 1997
  },
  "party": "DEM",
  "state": "AR"
},
{
  "president": "Coolidge, Calvin",
  "term": {
    "start": 1923,
    "end": 1927
  },
  "party": "REP",
  "state": "VT"
},
{
  "president": "Fillmore, Millard",
  "term": {
    "start": 1953,
    "end": 1957
  },
  "party": "REP",
  "state": "TX"
},
{
  "president": "Ford, Gerald R.",
  "term": {
    "start": 1850,
    "end": 1854
  },
  "party": "WHG",
  "state": "NY"
},
{
  "president": "Garfield, James A.",
  "term": {
    "start": 1973,
    "end": 1977
  },
  "party": "REP",
  "state": "NB"
},
{
  "president": "Grant, Ulysses S.",
  "term": {
    "start": 1881,
    "end": 1885
  },
  "party": "REP",
  "state": "OH"
},
{
  "president": "Harding, Warren G.",
  "term": {
    "start": 1869,
    "end": 1873
  },
  "party": "REP",
  "state": "IL"
}

```

Masking et al in Hadoop, too

The screenshot displays the IRI Workbench interface, specifically the Transform Mapping Diagram for a Hadoop job. The diagram shows the flow of data from 'personalInformation2' through a 'Sort' action to two output datasets: 'female_personal_info_encrypted' and 'male_personal_info_encrypted'. The 'Sort' action is configured with a 'NAME' key. The output datasets are configured with 'Process DELIMITED' and 'Include where GENDER EQ 0' and 'Include where GENDER EQ 1' respectively.

The 'Run Configurations' dialog is open, showing the configuration for the 'Hadoop_demo' job. The 'Main' tab is selected, and the 'File' is set to 'Hadoop/HadoopDemo.scl'. The 'Working directory' is '/user/java/demo/'. The 'Engines' section shows 'Map Reduce 2' selected, with other options like 'Spark', 'Spark Stream', 'Storm', and 'Tez' available.

A green arrow points to the 'Map once, deploy anywhere' text, which is overlaid on the diagram.

Two 'Data Viewer' windows are visible at the bottom. The left window shows the input data 'personalInformation2' with columns 'Name' and 'ID'. The right window shows the output data 'female_personal_info_encrypted' with columns 'Name' and 'ID'.

Input Data (personalInformation2):

ID	Name
1	Jessica Steffani
2	Cody Blagg
3	Jacob Blagg
4	Justine Rushlo
5	Maria Sheldon
6	Keenan Ross
7	Francesca Leonie
8	Nadia Elyse
9	Gordon Cade
10	Hanna Fay

Output Data (female_personal_info_encrypted):

ID	Name
1	Jessica Steffani
2	Cody Blagg
3	Jacob Blagg
4	Justine Rushlo
5	Maria Sheldon
6	Keenan Ross
7	Francesca Leonie
8	Nadia Elyse
9	Gordon Cade
10	Hanna Fay

Output Data (male_personal_info_encrypted):

ID	Name
1	Jessica Steffani
2	Cody Blagg
3	Jacob Blagg
4	Justine Rushlo
5	Maria Sheldon
6	Keenan Ross
7	Francesca Leonie
8	Nadia Elyse
9	Gordon Cade
10	Hanna Fay


Dynamic Data Masking Options

Method	Operation
ODBC Select / Update	Apply FieldShield column masks to target (view) tables for specific users/rows
DB App Invocation	Use .NET or Java SDK library functions or system-call job scripts on the fly
In-Situ Redaction	User and SQL-specific full and partial column masking on query
Custom I/O Procedures	Drive real-time application data directly to/from FieldShield jobs in memory
Real-Time Processing	Hadoop Spark and Storm processing of dynamic input streams (via Voracity VGrid)
Proxy-based	New "JDBC SQL Trail" driver to intercept application queries with minimal impact
Governance Mode	New runtime facility tied to RBAC/IAM infrastructure masks fields for some users

Encryption Key Management Options

1. Passphrase (key string) embedded in script, in clear or encrypted text
2. Passphrase string as environment variable
3. Passphrase string in (securable) key file
4. MFA, HSM/VM etc. via [Azure Key Vault](#)
5. Townsend Security [Alliance Key Manager](#)

PII Encryption through Azure Key Vault

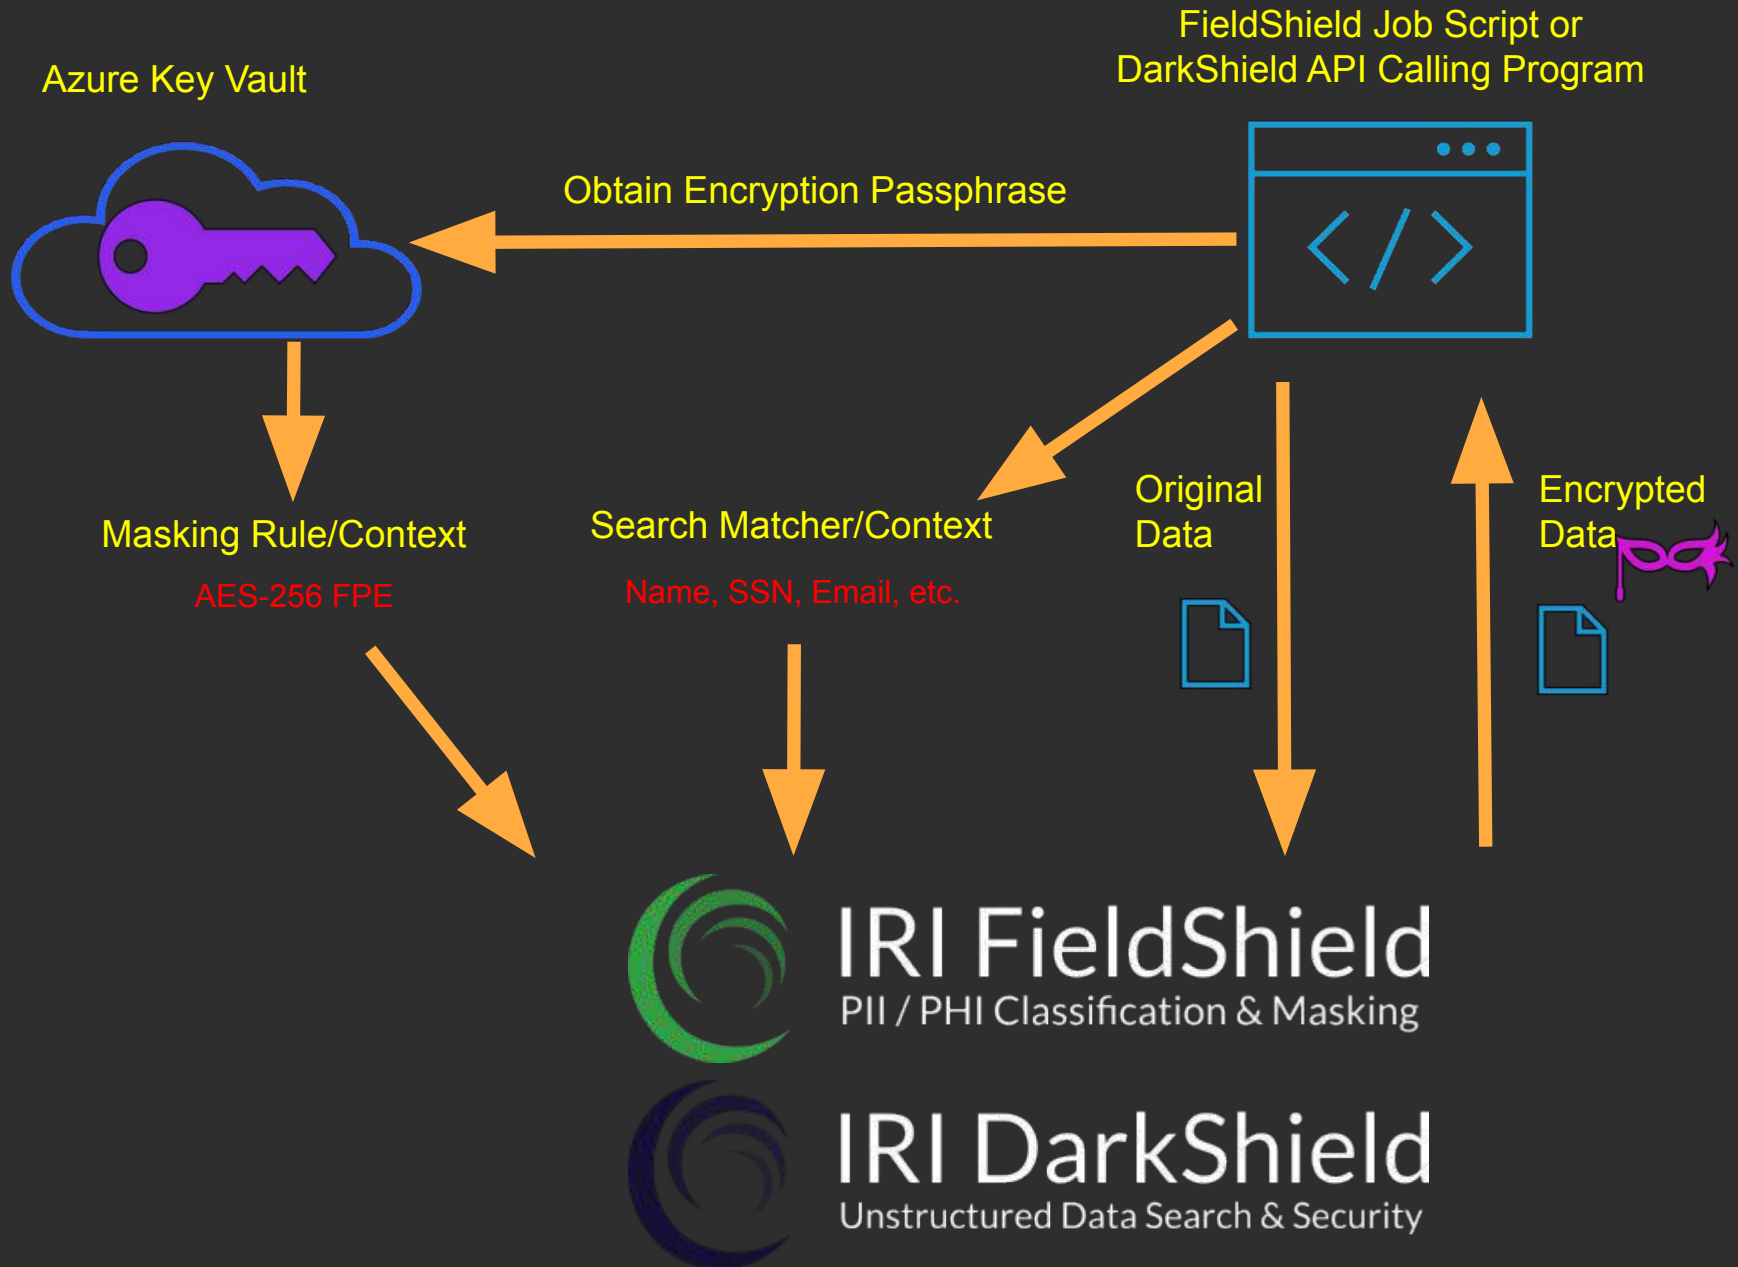

User Profiles

- Vertical industries and governmental agencies storing, processing, or outsourcing applications with sensitive data, such as:
 - Banks
 - Census / Tax
 - Defense
 - Health Care
 - Insurance
 - Schools
- Application, DB, and DW users handling sensitive data
- CISOs, compliance teams, consultants, IT managers, and solution architects

Use Cases

Tesco Bank/RBS UK

- Decrypt and re-encrypt fields in credit card migration and test files
- Generate and manage encryption and user ID keys
- Other projects protect 38,265 records per minute on Windows

Accenture Singapore

- Design and run encryption and masking jobs on Linux servers
- Secure PHI for the Ministry of Health Holdings (MOHH)'s Oracle DB
- Row sequencing and job audits

Medicx Media Solutions USA

- Encryption and hashing functions to PII and PHI in geo-medical consumer health databases
- Exceeds HIPAA requirements in provisioning mScores™ data to digital and direct marketers

Key Differentiators

Developer Support

- Version controls
- Master data definition
- Secure key management
- Git project management (teaming)
- SDK supports .NET and Java calls
- Data profiling and metadata discovery
- XML (and soon JSON) job logs, IAM

Price Performance

- The data-centric security tool with:
 - ➔ The most sources
 - ➔ The most protection functions
 - ➔ The most target file formats
- Fastest standalone protection software

One-Stop-Shop

- Integrated data classification & search
- Includes re-ID risk scoring for HIPAA
- Use w/Voracity ETL, migrate, cleanse
- Metadata-compatible with RowGen TDM
- Used in DB subsetting wizard
- Also works in Voracity BI & KNIME jobs
- Runs w/Actifio DB clones, Splunk ES, etc.

Ease-of-Use

- Familiar Eclipse GUI
- Self-documenting 4GL syntax
- Easy management and modification of jobs/metadata

Competitive Advantages

vs. IBM

- FieldShield scripts simpler than Optim interoperability model and Javascript options
- Seamless integration with more sources
- More functions
- Lower cost

vs. CA (Grid Tools)

- Built-in CoSort engine makes FieldShield faster than GT Fast Data Masking
- Tight integration with data profiling, ETL, data quality, and BI operations
- Multi-target/format options
- Lower cost
- Built-in re-ID risk determination wizard

vs. Oracle ([click](#))

vs. Informatica

- FieldShield DDM inclusive with product (compared to Informatica's upgrade)
- More SDM protection functions
- Integration with Eclipse and Excel
- Access to 4GL scripts
- Lower cost

vs. Imperva (Camouflage)

- FieldShield has more masking and encryption functions
- Hash, decode, and pseudonymize functions
- Faster and more extensible in the IRI Workbench IDE
- Lower cost



IRI CellShield
PII / PHI Search & Mask in Excel


IRI Data Protector Suite

What CellShield EE Does

Note: [FieldShield & DarkShield Support Excel, too!](#)



Search



Mask




Extract
Report

- Discovers, reports, and masks PII and perform audit actions in Excel 2010 & later
- Searches and secures PII in spreadsheets on one PC or throughout an SMB LAN
- Provides common and allow new search pattern definitions for PII formats
- Searches for strings in a dictionary, and find/fix PII *floating* in cells
- Supports reuse and sharing of patterns in project or cloud repositories
- Generates a report of all patterns found and open it for action in a worksheet
- Opens applicable worksheets and highlights the located ranges for protection
- Encrypts, redacts, or pseudonymizes in one-pass with chosen functions and options
- Reveals data with the decryption key, or if reversible pseudonymization was used
- Overlays results directly into the affected cells, or in another worksheet
- Moves between, or bulk-remediates all, identified worksheets and ranges
- Auto-inserts protection details into an un-editable audit column in the report
- Logging capability is configurable through the user interface, and allows for audit reports, error messages, and selected ranges to be sent to any of the following logging sources:
audit column, email, Datadog, Splunk, file system.

CellShield PII Discovery

The dark data profiling wizard in the IRI Workbench searches network-wide for sensitive data in spreadsheets based on user-specified (plus popular and saved) Java regular expressions (patterns):

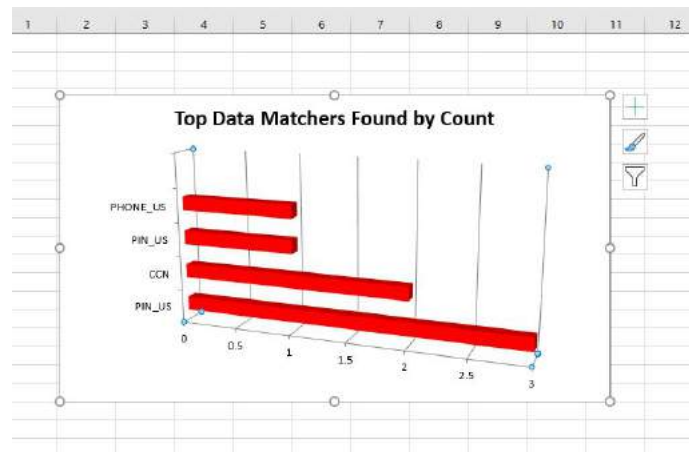

New Dark Data Search/Masking Job

Data Sources
Specify the input data sources.

Source URI	Add...	Edit...	Remove...	Up
file:/C:/Users/dakoz/Downloads/cellshieldtest-20200706T17062...				
file:/C:/Users/dakoz/Downloads/cellshieldpractice (fileTypes: [Ex...				
file:/C:/Users/dakoz/Downloads (fileTypes: [Excel 2003 (.xls), Exc...				

Search Matcher
Match Data Classes or Groups to a Data Rule.

Name:

Description:

Data Class Name: Details: Browse... Create...

Rule Name: Details: Browse... Create...

Filters:

Details	Type	Add...	Edit...

Data Class Selection
Select a Data Class or Data Class Group.

Data Class:

Details	Type
FIRST_NAME	Data Class
FULL_NAME	Data Class
LAST_NAME	Data Class

CellShield Search Report & Action Sheet

The report produced by the profiling wizard opens in a dynamic worksheet supported by an action dialog for protection and auditing activities:

The screenshot shows the CellShield Spreadsheet Selector dialog box. The dialog has the following fields and options:


- Interchange File:** C:\Users\rpekarch\Documents\SearchOutput.eif (with a Browse button)
- Workbook:** C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNHSN1.xlsx
- Sheet Name:** Sheet1
- Column:** A
- Start Row:** 3
- End Row:** 103
- Name of Pattern:** NHS_Number
- Pattern:** \b[0-9]{3}\s[0-9]{3}\s[0-9]{4}\b
- Remediate (protect) all spreadsheets in bulk, or toggle between sheets to protect manually.**
- Buttons:** Bulk Remediate, Choose Pattern, Choose Protection Type, Open Selected Workbook.

The background Excel spreadsheet shows a table with the following data:

Include File	File Path	File Name	Sheet Name	Pattern Name(s)	Pattern
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNHSN1.xlsx	NamesNHSN1.xlsx	Sheet1	NHS_Number	\b[0-9]{3}\s[0-9]{3}\s[0-9]{4}\b
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNHSN2.xlsx	NamesNHSN2.xlsx	Sheet1	NHS_Number	\b[0-9]{3}\s[0-9]{3}\s[0-9]{4}\b
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNHSN3.xlsx	NamesNHSN3.xlsx	Sheet1	NHS_Number	\b[0-9]{3}\s[0-9]{3}\s[0-9]{4}\b
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNHSN4.xlsx	NamesNHSN4.xlsx	Sheet1	NHS_Number	\b[0-9]{3}\s[0-9]{3}\s[0-9]{4}\b
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNHSN5.xlsx	NamesNHSN5.xlsx	Sheet1	NHS_Number	\b[0-9]{3}\s[0-9]{3}\s[0-9]{4}\b
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNINO1.xls	NamesNINO1.xls	Sheet1	NINo	\b([A-Z]{2})\s?[0-9]{2}\s?[0-9]{2}\s?
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNINO2.xlsx	NamesNINO2.xlsx	Sheet1	NINo	\b([A-Z]{2})\s?[0-9]{2}\s?[0-9]{2}\s?
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNINO3.xls	NamesNINO3.xls	Sheet1	NINo	\b([A-Z]{2})\s?[0-9]{2}\s?[0-9]{2}\s?
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNINO4.xlsx	NamesNINO4.xlsx	Sheet1	NINo	\b([A-Z]{2})\s?[0-9]{2}\s?[0-9]{2}\s?
☒	C:\Users\rpekarch\Documents\Testing Documents for DDD\NamesNINO5.xls	NamesNINO5.xls	Sheet1	NINo	\b([A-Z]{2})\s?[0-9]{2}\s?[0-9]{2}\s?


CellShield Masking Functions

Perform point-and-click encryption and decryption, redaction (full or partial cell), or pseudonymization (reversible and non-reversible) of applicable ranges within the spreadsheets in the report. Formulas may also be encrypted and decrypted.

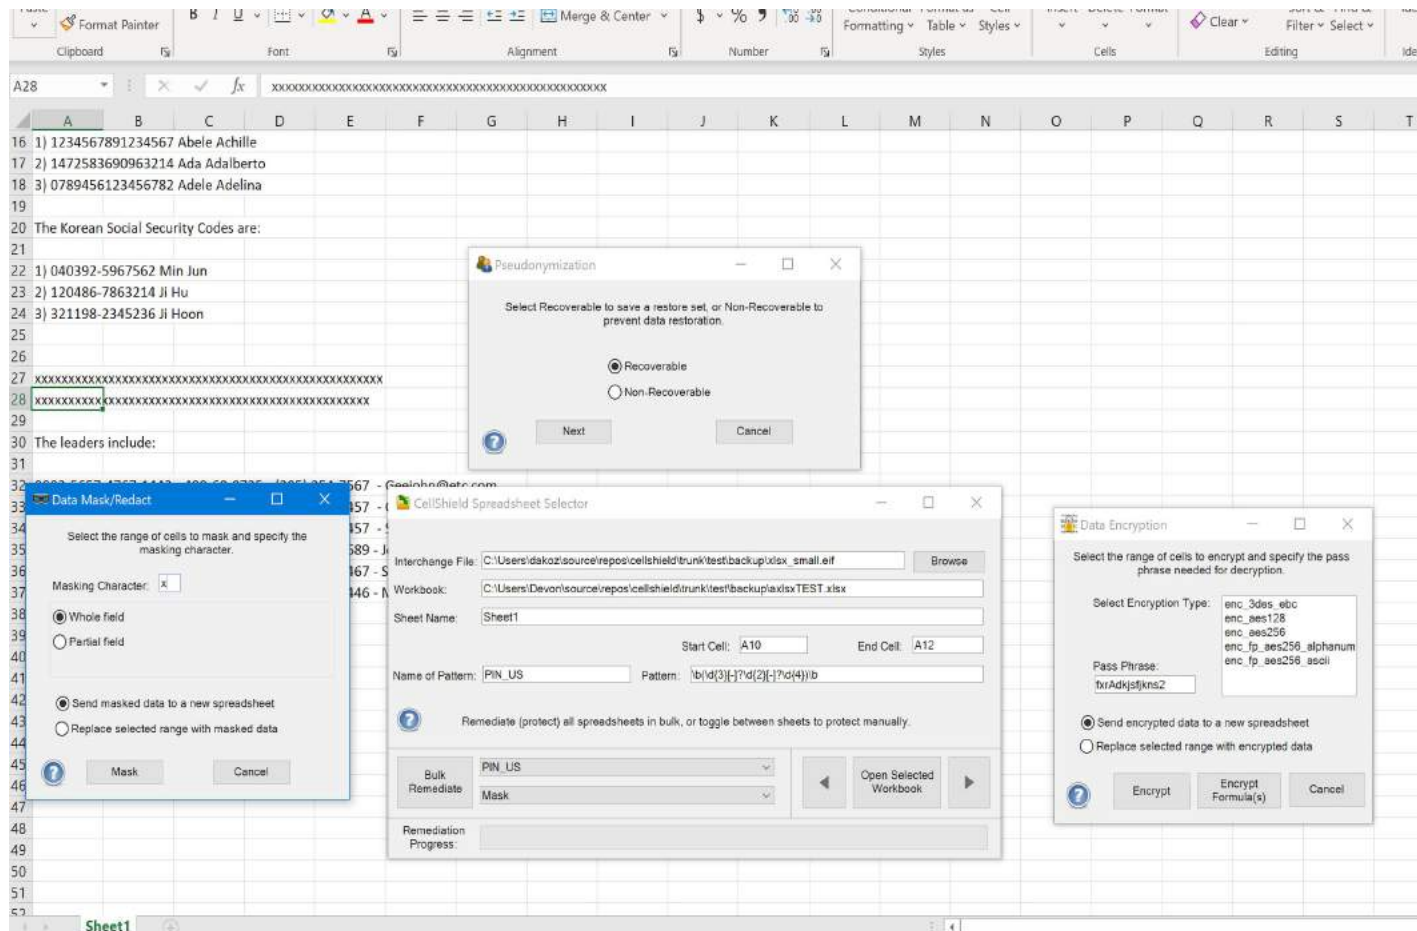

Intra-Cell Searching & Masking, Too

- Feature finds and protects floating PII, *ad hoc*, or *en masse*
- Available protections include encryption, masking, and pseudonymization
- Encryption and pseudonymization are reversible through the decryption and recover options, respectively

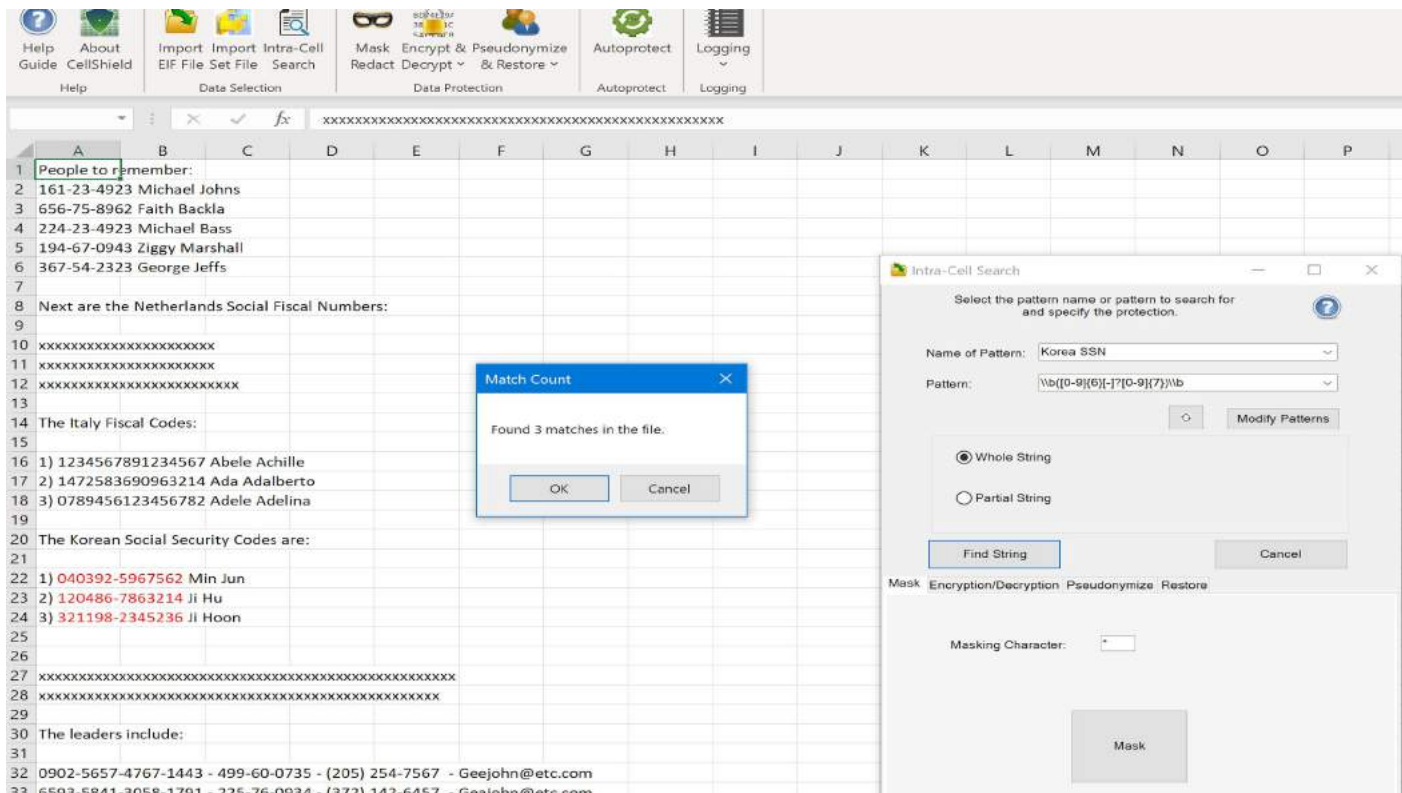

CellShield Audit Log Options

An uneditable log entry for the function applied to each pattern identified in the report is automatically added onto each action. Based on logging settings, this information may also be sent to a file, to Splunk, to Datadog, or to an email address.

The screenshot displays the CellShield application window with the 'Review' tab selected. The 'Audit' section is visible, showing a table of log entries. The table has columns for 'Column', 'Start Row', 'End Row', 'Comment', and 'Audit'. The 'Audit' column contains the following entries:

Column	Start Row	End Row	Comment	Audit
A	3	103		Action: Masked A3:A103 using # for characters 1 to 3, User: tupanu\rpekarch, Time Stamp: 6/16/2015 10:18:44 AM
G	1	101		Action: Encrypted G1:G101 using enc_fp_aes256_alphanum, User: tupanu\rpekarch, Time Stamp: 6/16/2015 10:18:44 AM
G	1	101		Action: Encrypted 3:103 using enc_3des_etc, User: tupanu\rpekarch, Time Stamp: 6/16/2015 10:18:44 AM
G	1	101		Action: Encrypted 1:101 using enc_3des_etc, User: tupanu\rpekarch, Time Stamp: 6/16/2015 10:18:44 AM
G	1	101		Action: Encrypted 1:101 using enc_3des_etc, User: tupanu\rpekarch, Time Stamp: 6/16/2015 10:18:44 AM

The 'Logging' window is shown with the 'Email' tab selected. It contains the following fields and buttons:

- from Email:
- to Email:
- Enable SSL:
- Email Subject:
- Is Body HTML:
- Mail Server:
- Username:
- Password:
- Port:
- Batch Posting Limit:
- Period (Minutes):
- RestrictedtoMinimumLevel:
- Buttons:
- Update JSON Configuration button

CellShield EE Roadmap



Search



Extract



Mask



Report

New in Version 2 (Released Q3'20)	What's Planned for Version 3 (2022)
Faster multi-sheet, and full-sheet masking	Support for other hardware platforms
Improved audit logging, with a configurable logging framework that allows for feeds to Splunk, Datadog, Email, and files. Selected ranges and error messages may also be logged.	Integration with Azure key vault for managing encryption keys
New intracellular functions, including encryption, decryption, pseudonymization and restoration	Integration with Active Directory for IAM
Searching and masking of UTF-8 data types	FPE for multi-byte characters
New Autoprotect form for simple bulk remediation	Additional masking functions (e.g., blurring)
Encryption/decryption of formulas	Automated masking through macros
Charts to display search results graphically	Support for sheets in Azure (like DarkShield)



IRI DarkShield
Unstructured Data Search & Security

IRI Data Protector Suite


What DarkShield Does



Search



Extract



Redact



Audit

- Simultaneously scans, extracts, and de-IDs or deletes PII (and audits actions) in all supported file formats
- Handles PII floating in semi/unstructured text, MS/PDF documents, BLOB columns, and NoSQL collections
- Finds faces or defined data classes tied to RegEx patterns, lookup sets, NER models, and/or image regions
- Builds, saves, and re-uses semi-supervised, machine learning models in project or cloud repositories
- Blacks-out PII in images, blurs faces, and applies of encryption (including FPE), pseudonymization, hashing, encoding, bit scrambling, redaction, or erasure functions for PII in text files and documents
- Writes masked files atop originals, or to different folders with the same file names and formats
- Shows search, remediation, and model training job status via real-time progress bars
- Shares search methods and masking functions with IRI FieldShield and IRI CellShield EE
- Generates logs of all values found or masked, along with IRI-compatible metadata for BI, queries, etc.
- Creates graphical, interactive displays of search and mask results, or hand-offs log files to Splunk
- Runs in IRI Workbench with other IRI and Eclipse tools, from the command line, or via REST API

Granular Sourcing/Targeting



Search



Extract



Redact



New Dark Data Search/Masking Job

Search Matchers
Add and remove Data Class search matchers.

Library Location: darkshield

Data Source
Specify the URI of the input data source.

Type: File System

Directory: C:/Users/cosort/Desktop/demos/DarkShield-demo/Test_Documents Browse...

[Include]:
[Exclude]:

☒ Recursive

File Types:

- ☒ Email Message (.eml)
- ☒ Excel 2003 (.xls)
- ☒ Excel (.xlsx)
- ☒ Offline Outlook Data File (.ost)
- ☒ Portable Document Format (.pdf)

Select All
Select None

OK Cancel

Matcher Type	Rule
Data Class Gro...	EXPRESSION = ...
Data Class	EXPRESSION = ...

Next > Finish

Data Target
Specify the URI of the target data source.

Type: SMB

URL: DarkShield-Demo New...

Path: /public/ Browse...

File Exists: Override

☐ Flatten
☐ Keep last modified date

OK Cancel

Use the DarkShield dark data discovery wizard to find sensitive data in unstructured data LAN-wide (or in S3), mask it, and re-target the results.



Extract

workspace - IRI Development - DarkShield/DarkShieldOutput.sql - IRI Workbench - C:\IRI\workspace

File Edit Navigate Search Project Run Window Help

Quick Access

DDDReport.scl DarkShieldOutput.sql search_output.txt

Connection profile

Type: Oracle_11 Name: Oracle Database: XE Status: Connected, Auto Commit

Console Properties Scheduler SQL Results

Type query expression

Status Operatic

✓ Succes SELECT

	NAME	RESULT	SPAN	OWNER	REGULARITY	LINKAGE	READONLY	HIDDEN	FILESIZE	DATECREATED	DATEMODIFIED	DATEACCESSED	FILEPATH	FILETYPE
1	PHONE_INTE...	727	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
2	PHONE_INTE...	444	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
3	PHONE_INTE...	6593	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
4	PIN_US	194-67-09...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
5	PHONE_INTE...	321	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
6	PHONE_INTE...	3333	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
7	PIN_US	367-54-23...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
8	PIN_US	123-45-67...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
9	PHONE_INTE...	205	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
10	PHONE_INTE...	3433	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
11	PIN_US	987-65-43...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
12	PHONE_INTE...	142	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
13	PHONE_INTE...	456	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
14	PHONE_INTE...	7777	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
15	PIN_US	103-81-23...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
16	PHONE_INTE...	321	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
17	PHONE_INTE...	555	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
18	PHONE_INTE...	1212	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
19	PHONE_INTE...	12345678...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
20	PHONE_INTE...	14725836...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
21	PHONE_INTE...	78945612...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
22	PIN_KOREA	040392-5...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf
23	PIN_KOREA	120486-7...	Pag...	dmitry	true	false	false	false	61611	2018-04-05T...	2018-04-05T1...	2018-06-07T1...	/home/...	pdf


Some records are hidden

Displayed 1 of 1 results: 1 succeeded, 0 failed, 0 terminated, 0 warning, 0 critical error

search_output.txt

```
193 PHONE_INTERNATIONAL|3742|slideShow 1, slide 2, slide-content 2|d
194 PHONE_INTERNATIONAL|3056|slideShow 1, slide 3, slide-content 3|d
195 PIN_US|723-64-2357|slideShow 1, slide 8, slide-content 8|dmitry|
196 PHONE_INTERNATIONAL|7779|slideShow 1, slide 5, slide-content 5|d
```

Optionally and automatically extract all of the values you searched for (think GDPR data portability or CCPA DSARs), plus the metadata associated with the files containing those values.



Redact

```
{
  "example-redacted.json": {
    "id": 1,
    "first_name": "Jeanette",
    "last_name": "Penddreth",
    "gender": "Female",
    "email": "*****",
    "ip_address": "26.58.19",
    "phone_numbers": [
      {
        "type": "personal",
        "number": "*****"
      },
      {
        "type": "office",
        "number": "*****"
      }
    ],
    "transcript": "Hey, email me at *****"
  },
  {
    "id": 2,
    "first_name": "Giavani",
    "last_name": "Frediani",
    "emails": [
      {
        "email": "*****"
      },
      {
        "email": "*****"
      }
    ],
    "data": {
      "gender": "Male",
      "ip_address": "26.58.19"
    }
  },
  {
    "id": 3,
    "first_name": "Michael",
    "last_name": "Johns",
    "gender": "Male",
    "ip_address": "26.58.19"
  }
]
```

```
1 Running org.superbiz.hello.HelloTest
2 Apache OpenEJB 4.0.0-beta-1 build: 20111002-04:06
3 http://tomee.apache.org/
4 INFO - openejb.home = /Users/*****/examples/helloworld-weblogic
5 INFO - openejb.base = /Users/*****/examples/helloworld-weblogic
6 INFO - Configuring Service(id=Default Security Service, type=SecurityService, provider-id=Default Security Service)
7 INFO - Configuring Service(id=Default Transaction Manager, type=TransactionManager, provider-id=Default Transaction Manager)
8 INFO - Found EjbModule in classpath: /Users/*****/examples/helloworld-weblogic/target/classes
9 INFO - Beginning load: /Users/*****/examples/helloworld-weblogic/target/classes
10 INFO - Configuring enterprise application: /Users/*****/examples/helloworld-weblogic/classpath.ear
11 INFO - Configuring Service(id=Default Stateless Container, type=Container, provider-id=Default Stateless Container)
12 INFO - Auto-creating a container for bean HelloBean: Container(type=STATELESS, id=Default Stateless Container)
13 INFO - Enterprise application "/Users/*****/examples/helloworld-weblogic/classpath.ear" loaded.
14 INFO - Assembling app: /Users/*****/examples/helloworld-weblogic/classpath.ear
15 INFO - Jndi(name=MyHello) --> Ejb(deployment-id=HelloBean)
16 INFO - Jndi(name=global/classpath.ear/helloworld-weblogic/HelloBean)
17 INFO - Jndi(name=global/classpath.ear/helloworld-weblogic/HelloBean)
18 INFO - Created Ejb(deployment-id=HelloBean, ejb-name=HelloBean, container-id=HelloBean)
19 INFO - Started Ejb(deployment-id=HelloBean, ejb-name=HelloBean, container-id=HelloBean)
```



1000 Walnut
Kansas City MO 64106-3686

0701 Ogdsohii Kg.
Xlots Llet, UW 89090-8827

Primary Account Number: 489671137

Bank Statement

If you have any questions about your statement,
please call us at 816-234-2265

Statement Date: June 5, 2003

Page Number: 1

CONNECTIONS CHECKING Account # 489671137

Account Summary Account # 489671137

Beginning Balance on May 3, 2003	\$7,126.11
Deposits & Other Credits	+3,615.08
ATM Withdrawals & Debits	-20.00
VISA Check Card Purchases & Debits	-0.00
Withdrawals & Other Debits	-0.00
Checks Paid	-200.00

Ending Balance on June 5, 2003

\$10,521.19

Apply width-preserving redaction, blackout, deletion, encryption, pseudonymization, and other data masking functions to protect PII and comply with data privacy laws like the [GDPR](#).

Deletion Function



Search




Extract



Redact



Audit

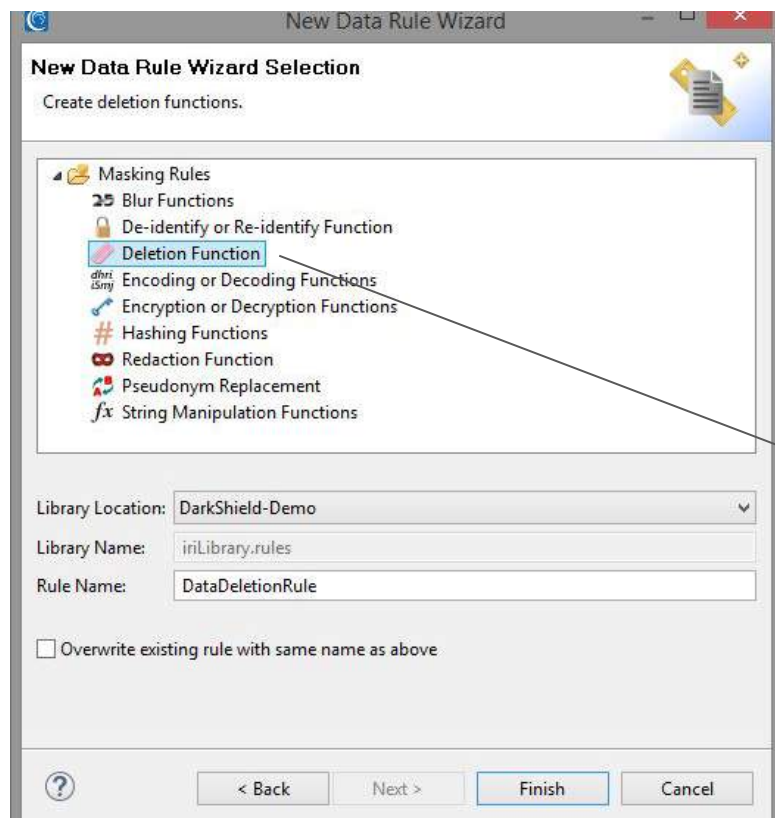

IRI FieldShield, DarkShield & CellShield and other features in Voracity combine to comply with GDPR (and thus CCPA, KVKK, etc.) provisions like:

- Discovery and **De-Identification** of PII and PI
- The right to be **Forgotten** (via erasure like this)
- Data **Portability** (via extraction and reformatting)
- Data **Rectification** (via discovery and cleansing)

Image File Redaction



Search



Extract



Redact



Audit



BMP,
DICOM
GIF,
JPx,
PNG,
and
TIFF,
alone or
in docs.

at his touch of a certain icy pang along my blood. "Come, sir," said I. "You forget that I have not yet the pleasure of your acquaintance. Be seated, if you please." And I showed him an example, and sat down myself in my customary seat and with as fair an imitation of my ordinary manner to a patient, as the lateness of the hour, the nature of my preoccupations, and the horror I had of my visitor, would suffer me to muster.

"I beg your pardon, Dr. [REDACTED]" he replied civilly enough. "What you say is very well founded; and my impatience has shown its heels to my politeness. I come here at the instance of your colleague, Dr. [REDACTED] on a piece of business of some moment; and I understood..." He paused and put his hand to his throat, and I could in spite of his collected manner, that he was wrestling again with the approaches of the hysteria—"I understood, a drawer..."

But here I took pity on my visitor's suspense, and some part on my own growing curiosity.

"There it is, sir," said I, pointing to the drawer, where it lay floor behind a table and still covered with the sheet.


He sprang to it, and then paused, and laid his hand up heart: I could hear his teeth grate with the convulsive action of his jaws; and his face was so ghastly to see that I grew alarmed for his life and reason.

"Compose yourself," said I.

He turned a dreadful smile to me, and as if with the decision of despair, plucked away the sheet. At sight of the contents, he uttered one loud sob of such immense relief that I sat petrified. At the next moment, in a voice that was already fairly well under control, "Have you a graduated glass?" he asked.

I rose from my place with something of an effort and gave him what he asked.

He thanked me with a smiling nod, measured out a few grains of the red tincture and added one of the powders. The tincture, which was at first of a reddish hue, began, in proportion

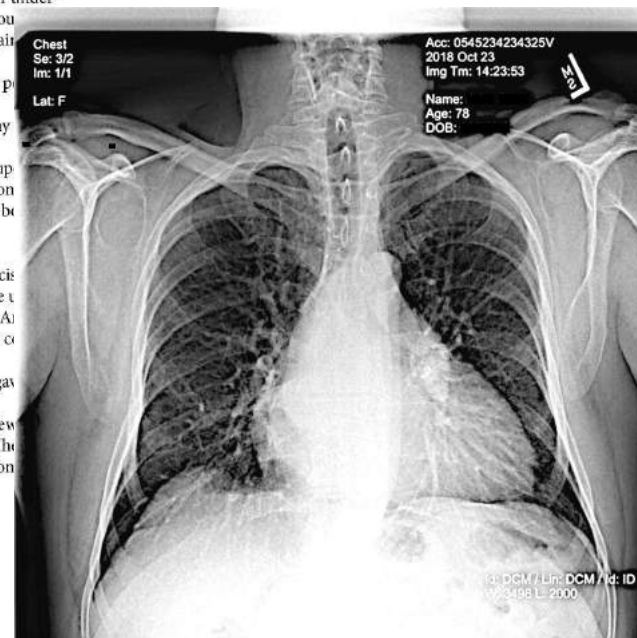

Search & Mask via Column & Path Filters



Search



Extract



Redact



Audit

Search Matcher
Match Data Classes or Groups to a Data Rule.

Name:

Description:

Data Class Name: Details:

Rule Name: Details:

Filters:

Details	Type
\$..clients[*].email	JsonFilter

Filter
Create a filter for filtering content that will be searched.

Type:

☒ Range from to
☒ Including this value ☐ Including this value

☐ Literal entry

Preview:
☒ Ignore First
☐ Filter by Row

Allows the user to take the column, segment, or key-value pair structure of an Excel sheet, CSV, HL7, X12, JSON or XML file -- or JDBC-connected DB column names -- into account in searches to:

- Ignore fields that do not match the filter
- Increase search speed, and narrow the scope of the search results

```
MSH|^~\&|VA StarLIMsv10 Prod^2.16.840.1.114222.4.3.3.2.2.4^ISO|VA PHL Richmond^2.16.840.1.114222.4.1.9977^ISO|f
PID|1||987654321^^^HospitalSystem&2.16.840.1.114222.XXX&ISO^MR||SLK0Z^FZPXDVH|MOHMAIDENONE|798684589276-7989|F|
NK1|1|SLK0Z^JZNN|MTH^Mother^HL70063|0047 Lmzu Aeniqi^^Yhvozgzg^UT^96981|^^^^^804^5693861||N^Next-of-Kin^HL7013|
ORC|RE|XXXXX^HospitalSystem^2.16.840.1.114222.XXX^ISO|555550001^VA PHL Richmond^2.16.840.1.114222.4.1.9977^ISO|
OBR|1|XXXXX^HospitalSystem^2.16.840.1.114222.XXX^ISO|555550001^VA PHL Richmond^2.16.840.1.114222.4.1.9977^ISO|
SPM|1|XXXXX&HospitalSystem&2.16.840.1.114222.XXX&ISO^555550001&VA PHL Richmond&2.16.840.1.114222.4.1.9977&ISO|
```


Relational and NoSQL Database Supports



Search



Extract



Redact



Audit

Data classes and filters can also be used to find and mask the PII within unstructured text columns in relational tables via JDBC drivers, or in CosmosDB, DynamoDB, BigTable, MongoDB, Cassandra, Elasticsearch, Redis, Solr and Couchbase collections/clusters.

Combine table filters with XML or JSON path filters to pinpoint and mask PII in unstructured XML or JSON text within RDB columns.

DarkShield can also automatically detect, search and mask binary data (images and MS/PDF documents) embedded within BLOB columns of JDBC-connected RDBs.

The screenshot displays the IRI DarkShield interface with two main panels. The top panel, 'URL Connection Details', shows configuration for a connection named 'Customers' to an 'ELASTICSEARCH (DarkShield only)' scheme on 'localhost' at port '9200' in the 'elasticsearch' cluster. The bottom panel, 'Search Criteria Details', shows a search named 'new_schema_search' with a source of 'dtp-jdbc/DarkShield?schemaName=public&include=clients' and a target of 'dtp-jdbc/DarkShield?schemaName=target'. It lists search matchers: NameColumnMatcher (ALL), EmailMatcher (EMAIL), AddressMatcher (ALL), and NamesNerMatcher (NAMES NER). Below this, a table shows search results for 'clients' and 'clients_masked'.

id	Abc name	Abc email	Abc address_xml	Abc notes
1	Ethan Nunez	nunez@ya...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>3516 Annabelle St.</a...	Hello, my name is Ethan Nunez ...
2	Ariana McKee	mckee@ya...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>6170 Jessica Pl.</add...	Hello, my name is Ariana McKee...
3	Alexandra Webster	alexandraw...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>696 Adam Dr.</addre...	Hello, my name is Alexandra We...
4	Jacob Edwards	jacobedwa...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>6039 Retha St.</addr...	Hello, my name is Jacob Edward...

id	Abc name	Abc email	Abc address_xml	Abc notes
1	Dujus Ukcoq	ihfXohQ5v...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>62 Wendy Cir.</add...	Hello, my name is Dujus Ukcoq ...
2	Zlmxii Qmztb	CW3uMpp...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>491 Bird Dog</addre...	Hello, my name is Ariana Mcke...
3	Pjzrnbcw Glihsa	zKNoN2d...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>147 Mint Ct.</addres...	Hello, my name is Alexandra W...
4	Dkagr Fhsolg	OkM4/P1f4...	<?xml version="1.0" encoding="UTF-8" standalone="no"?><address><address>36 Florida St.</addres...	Hello, my name is Dkagr Fhsolg...

NER & NLP with Machine Learning



Search



Extract



Redact



Audit

DarkShield supports both pre-trained OpenNLP Name Finder models or new Named Entity Recognition (NER) models that you can build and train inside its semi-supervised machine learning dialog.

This iterative process improves the accuracy of searches for names and other nouns based on their Natural Language Processing (NLP) context in sentences.

Compare this method to other DarkShield search methods, like pattern and lookup matches, path filters, or bounding-box areas (for images).

The screenshot shows the 'NER Model Builder' window with the 'Supervised Training' tab selected. The window contains the following elements:

- Supervised Training** header with a sub-instruction: 'Train the model on the data source.'
- Accepted Entities** section: 'Count: 294'. A list box contains 'Joe Smith', 'Taylor', and 'Wolf'. Navigation buttons '<<' and '>>' are present.
- Blacklisted Entities** section: 'Count: 6'. A list box contains 'da', 'Y', 'Short Unsigned 2', and 'S'. Navigation buttons '<' and '>' are present.
- Buttons**: 'Search', 'Train', and 'Edit' buttons are located below the entity lists.
- Bad Hits**: A label showing 'Bad Hits: 0'.
- Reject Threshold**: A numeric input field set to '0.400'.
- Training Output** section: A list box showing loglikelihood values for training iterations 97, 98, 99, and 100.
- Footer**: A help icon (?) and four navigation buttons: '< Back', 'Next >', 'Finish', and 'Cancel'.

Facial Detection & Trained Facial Recognition Masking



Search




Extract



Redact



Audit

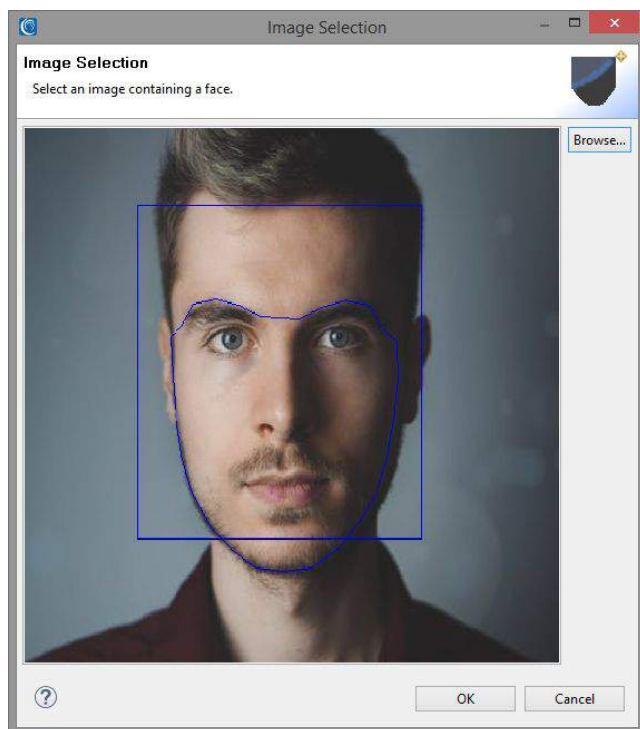

DarkShield can *detect* faces in any image and blur (all of) them, or just those it *recognizes* from your trained library of faces.

Documented RPC APIs



DarkShield API 1.3.0 OAS3

</docs/openapi/darkshield.yaml>

An RPC service for searching and masking unstructured text.

[IRI, Inc. - Website](#)

[Send email to IRI, Inc.](#)

search

POST `/api/darkshield/searchContext.create`

POST `/api/darkshield/searchContext.destroy`

POST `/api/darkshield/searchContext.search`

POST `/api/darkshield/searchContext.mask`

mask

POST `/api/darkshield/maskContext.create`

POST `/api/darkshield/maskContext.destroy`

POST `/api/darkshield/maskContext.mask`


POST `/api/darkshield/searchContext.mask`



Search



Extract



Redact



Audit

Host a context which can be called whenever a search operation needs to be performed. The Context contains a list of search matchers that will be used to match on the text. Multiple contexts with the same name cannot be created.

Parameters

Cancel

No parameters

Request body *required*

application/json

The Search Context.

Examples:

```
{
  "name": "MixedMatcherContext",
  "matchers": [
    {
      "name": "EmailMatcher",
      "type": "pattern",
      "pattern": "\\b[\\w_\\-+]+@[\\w-]+\\.([\\w]{2,4})\\.b"
    },
    {
      "name": "WordMatcher",
      "type": "ner",
      "modelUrl": "http://opennlp.sourceforge.net/models-1.5/en-ner-person.bin"
    }
  ]
}
```

```
curl -X POST "http://localhost:8080/api/darkshield/searchContext.mask" -H "accept: application/json" -H "Content-Type: application/json" -d '{
  "searchContextName": "MixedMatcherContext",
  "maskContextName": "MixedMaskingContext",
  "text": "Hello, my name is John Doe and my email address is johndoe@gmail.com."
}'
```

Request URL

`http://localhost:8080/api/darkshield/searchContext.mask`

Server response

Code Details

200

Response body

```
{
  "failedResults": [],
  "maskedText": "Hello, my name is Wazz Edk and my email address is BqJARRzCAMdtqXb3tJNBGB/RgNo3y+QKd0MscjZsgPW=-.",
  "results": [
    {
      "end": 26,
      "maskedResult": "Wazz Edk",
      "ruleName": "FpeNameRule",
      "start": 18
    },
    {
      "end": 95,
      "maskedResult": "BqJARRzCAMdtqXb3tJNBGB/RgNo3y+QKd0MscjZsgPW=-",
      "ruleName": "HashEmailRule",
      "start": 51
    }
  ],
  "unmatchedAnnotations": []
}
```

Download

Masking for Cloud Storage



Search



Extract



Redact



Audit

masked-bucket

OBJECTS

CONFIGURATION

PERMISSIONS

RETENTION

LIFECYCLE

Buckets > masked-bucket

UPLOAD FILES

UPLOAD FOLDER

CREATE FOLDER

MANAGE HOLDS

DOWNLOAD

DELETE



masked-container

Container

Search (Ctrl+/)



Upload



Change access level



Refresh



Delete



Change tie



Overview



Diagnose and solve problems

Authentication method: Access key (Switch to Azure AD User Account)

Location: masked-container

Search blobs by prefix (case-sensitive)



Show deleted blobs



Copy S3 URI

masked/

Objects

Properties

Objects (3)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)



Copy S3 URI



Copy URL



Download



Open

Delete

Actions

Create folder



Upload

Find objects by prefix



1




☐	Name	Type	Last modified	Size	Storage class
☐	 example.csv	csv	September 23, 2021, 11:33:42 (UTC-04:00)	297.0 B	Standard
☐	 test.json	json	September 23, 2021, 11:33:43 (UTC-04:00)	541.0 B	Standard
☐	 test.xml	xml	September 23, 2021, 11:33:44 (UTC-04:00)	646.0 B	Standard



Cloud Storage

Microsoft Azure
Blob Storage



amazon
S3

DICOM Anonymization



Search



Extract



Redact



Audit

Before DarkShield:

E		F		G	
1	Subject ID	Study UID		Study Description	
2		292821506	2.25.10646195478329164104825442366895644619	XR CHEST AP PORTABLE for Douglas Davidson	
3		292821506	2.25.10646195478329164104825442366895644619	XR CHEST AP PORTABLE for Douglas Davidson	
4		339833062	2.25.541629416691863029175036346640219638	NA	

After DarkShield:

C		D		E		F		G		H
1	3rd Party Analysis	Data Description URI		Subject ID	Study UID	Study Description		Study Date		
2	NO	https://doi.org/10.7937s17z-r072		703523712	2.25.106461990375634587137034423668956446198	XR CHEST AP PORTABLE for Axodquq Wmhpzjcx		7/13/201		
3	NO	https://doi.org/10.7937s17z-r072		703523712	2.25.106461990375634587137034423668956446198	XR CHEST AP PORTABLE for Axodquq Wmhpzjcx		7/13/201		
4	NO	https://doi.org/10.7937s17z-r072		204498801	2.25.541629416691863029175036346640219638	NA		7/5/200		




Easily query, analyze, and format the results of search and mask operation through built-in reports and this graphical display.



Or, export DarkShield log data for visualizations in BI tools like DataDog, or to SIEM environments like [Splunk ES](#), shown here.

It is also then possible to take actions through the Splunk [Adaptive Response Framework](#) or a Splunk [Phantom playbook](#).

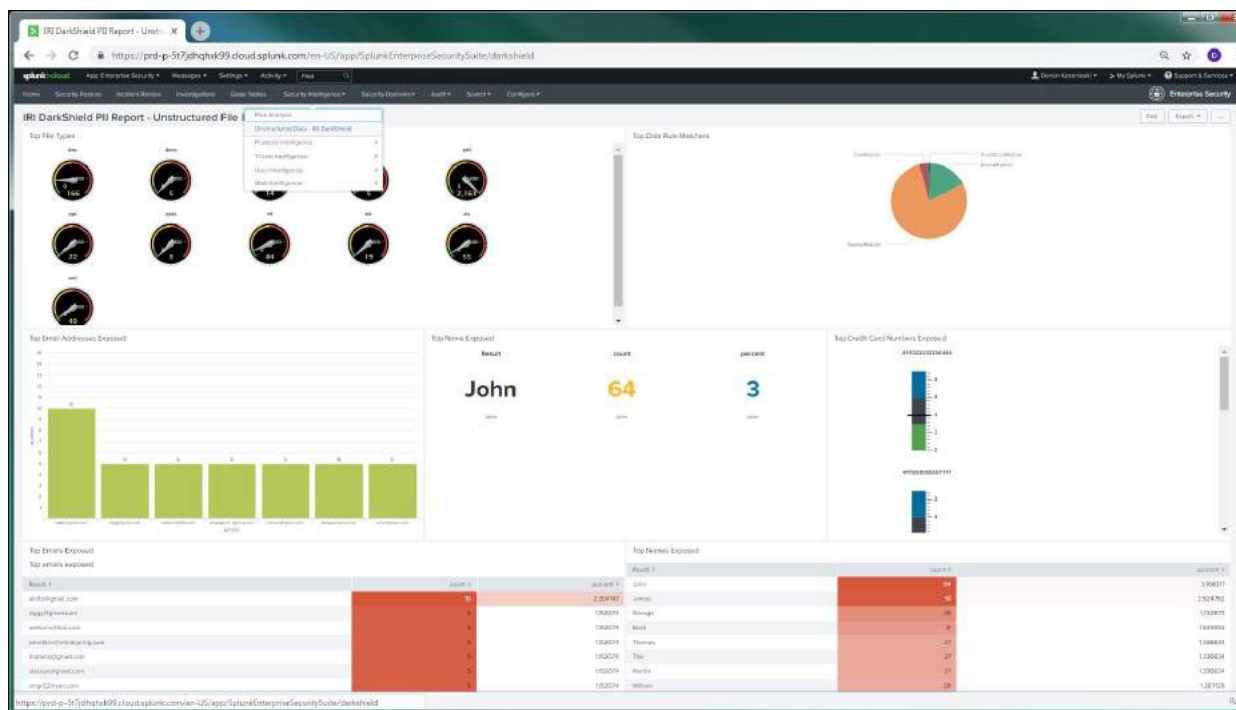

DarkShield Benefits

1. Combines PII discovery, delivery, deletion, and reporting in multiple unstructured source formats into one or more ergonomic operations
2. Allows pattern definition reuse and combination to consolidate searches
3. Consolidates multiple *right to be forgotten* and *data portability* requests into the same find/fix operation through literal names or lookup-file matches
4. Supports multiple drives, nodes, and threads for searching and masking work
5. Operates in the same Eclipse job design and metadata environment, IRI Workbench, with related data governance and management activities
6. Features affordable licensing options (standalone, bundled, or free in Voracity)
7. Integration with IRI FieldShield/Voracity data classification and masking functions
8. Parameter serialization and modeling for easy modification and batch execution

Development Roadmap

1. More unstructured format support, including A/V and proprietary/packaged apps
2. Additional ergonomic convergence with structured and embedded data sources
3. Plug-in integration with more SIEM tools *beyond* Datadog, Splunk ES, and Phantom Playbooks which are now supported, like IBM QRadar and SolarWinds
4. Retrofitting new API features into IRI Workbench wizards



IRI DMaaS
Data Masking as a Service

IRI Data Protector Suite


What is DMaaS?



Search



Extract



Mask



Report

- IRI Data Masking as a Service (DMaaS) is a professional service engagement
- DMaaS makes use of the proven IRI 'shield' software products described above
- Certified IRI experts classify, discover, and de-identify PII of concern in supported silos
- Also available: HIPAA re-ID risk scoring and anonymization, and 'fake PII' for testing
- IRI services are performed under a SoW with NDA, BAA, or other data security terms
- Source data that cannot be sent is accessed via VPN or secure public/private cloud
- Data is only accessed by IRI engineers in the US or certified partners like Capgemini
- All data access, classification, discovery (search) and masking operations are logged
- Billing is hourly or daily, with project rates available; IRI software costs are subsumed
- Customer is responsible for payment of cloud infrastructure of their choice

User Profiles

- DBAs and sysadmins responsible for PAN, PHI, PII or other sensitive information
- Sites needing standard data classification and consistent masking functions
- CISOs without sufficient internal IT resources to do this work internally
- Data governance and C-suite officers subject to compliance audits

Use Cases

RBS / Tesco (PCI DSS)

- Produced and implemented custom encryption for testing data in M&A

Confidential (HIPAA)

- Cataloged and de-identified protected health information

University of Adelaide (Privacy Act)

- Data classification, search, and de-identification of PII in massive PeopleSoft financial, HR, and campus test data schemas in Oracle



IRI RowGen
Smart Test Data Generation

*Also available with IRI Data Protector or
Manager Suites, and the IRI Voracity Platform*

What RowGen Does

- Creates synthetic but realistic random and random-real test data simultaneously
- Improves DB prototypes, application quality, benchmarking, and outsourced operations
- Uses standard DB DDL, production file, and custom metadata to define layouts
- Preserves structural and referential integrity of real EDW DBs for testing
- Produces data in any types, structure, volumes, value ranges, and if condition
- Synthesizes composite data values and custom (master) data formats
- Generates computationally valid and invalid NID (Codice Fiscale, etc.) SSNs, CCNs
- Sets and graphs test data value distributions (linear, normal, random, etc.)
- Applies common attribute rules (like lookups) rules for pattern-matched field names
- Filters, transforms, and pre-sorts test data while it's being generated
- Writes loader metadata and perform direct path loads for test DB populations
- Builds test flat-file and custom/structured detail and summary report targets
- Subsets and masks databases automatically for test purposes
- Provides SDK functions for generating test data in Java apps and Hadoop
- Works with RDB, IRI, and third-party metadata, plus many CI/CD, cloning and TDM tools

Synthesize w/ DB Data Models and File Metadata

Build Test Data for:

- Altibase
- CLF/ELF
- COBOL
- CSV
- DB2
- Hadoop
- Hive
- JSON
- LDIF
- MySQL
- NoSQL DBs
- Oracle
- SQL Server
- Sybase
- Teradata
- Vertica
- XML

The screenshot displays the IRI RowGen software interface, which is used for synthesizing test data. The interface includes a Project Explorer on the left, a central diagram area showing data flows and transformations, and a console window at the bottom displaying generated data.

Project Explorer: Shows a project named "RowGen_Test_DB_Data" with various files and folders, including "DMsqlschema", "Six Table Relational Diagram.png", "saved-example", "set_files", "setup", "initlibrary.patterns", "Pattern Library: initlibrary", "Pattern: CompanyName", "initlibrary.rules", "Rule Library: initlibrary", "Rule Matcher Catalog: RowGenFlow", "Field Rule SetRule", "Field Rule Property: SET", "Field Rule Property: NAME", "Notes.html", "representations.aid", "RowGen_Test_File_Data", "gradles", "scripts", and "set_files".

Diagram Area: Displays a complex diagram of data flows and transformations. It includes a "New Pseudo Set File from Column..." dialog box and a "Report" section with "Section Options" for "Process CSV" and "Process JSON".

Console Window: Shows the output of the data generation process, including a table of generated data:

Status	CLAIM_NUMBER	CREATE_DATE	PATIENT_LAST_NAME	PATIENT_FIRST_NAME	CREDIT_CARD	SSN	PATIENT_ADDRESS	CTY	STATE	DR_NAME
Success	1	20000040133	1982-10-11	Spain	None	3374-7233-6...	1501 Lowry Ave N	Fla.	Me.	None
	2	20013008182	1959-10-12	Cross	None	5047-2893-3...	88- 810 Race St	Sp.	Ore.	None
	3	21700205242	1911-12-18	Wier	None	5207-1562-4...	2413 Rowe Garle	Se.	Cal.	None
	4	19700000001	1978-01-11	Wien	Executive	4770-0673-0...	4014 Keweenaw Dr	Pa.	Ind.	None

The console also shows a summary: "Total 20 records shown".

DB Subsetting, Masking Optional

Included table subsetting and test data generation wizards facilitate DB and EDW prototyping, as well as test data virtualization for DevOps. Masked and referentially-correct copies of production table extracts ensure that production data is safe and test data is realistic. Run these batch jobs from IRI Workbench or Value Labs TDH, the command line, or Windocks.

Data Extraction Stage

Tables selected: 1

Connection profile: Oracle Local

Table selection:

- ☐ SCOTT.ORDERS_OE
- ☐ SCOTT.ORDER_ITEMS_OE
- ☐ SCOTT.PERSONS
- ☐ SCOTT.PRODUCT_INFORMATION_OE
- ☐ SCOTT.PROJECT_DIM
- ☐ SCOTT.REGIONS_HR
- ☒ SCOTT.SALE_DIM
- ☐ SCOTT.SUB_CATEGORY_DIM

Sort

Expand and select the fields to sort. If you want to

Input Fields:

- ☒ Infile SCOTT.SALE_DIM
 - ☒ Alias: SCOTT_SALE_DIM
 - ☒ Process ODBC
 - ☒ SALE_ID
 - ☒ SALE_DATE
 - ☒ QTY_SOLD

Data Loading

Select the subset targets and view selected tables and their relations.

Connection profile: Oracle Local

Schema name: SCOTT

Output mode: CREATE

☐ Disable direct path load

☒ Temporarily disable foreign keys on tables before insert

☐ Include a drop table script for tables created in this job

Naming options

Unless using a different schema or database, outputs must have a different name than inputs so they are not overwritten.

Select the naming option and then enter the appropriate prefix, postfix, or name.

Field Modification Rules

Add and remove field modification rule matchers.

Library Location: Subsetting

Name	Prefix	Type	Details
Emp	MASK_\${FIELDNAME}	EXPRESSION, ...	EXPRESSION = replace_chars(\${FIELDNAME}, "a", "x")...

Separator: \t

☐ Check Only

Summary

The batch file and scripts will be generated using this information.

Summary:

Extractor: ODBC
 DSN Name: Oracle_Local12_32
 Vendor: Oracle
 Provider: Oracle
 Host: pathogen:1522
 Instance: ORA12
 User: scott

Rule info:

Rule name: FieldRedactionRule

SCOTT.CATEGORY_DIM.CATEGORY_NAME
 SCOTT.DEPT_DIM.DEPT_NAME
 SCOTT.EMP_DIM.EMP_NAME
 SCOTT.EMP_SALARY_RANGE_DIM.RANGE_NAME
 SCOTT.ITEM_DIM.ITEM_NAME
 SCOTT.ITEM_PRICE_RANGE_DIM.RANGE_NAME
 SCOTT.PROJECT_DIM.PROJECT_NAME

Source tables:

SCOTT.SUB_SALE_DIM does not exist in load target. A DDL will be created.
 SCOTT.SUB_CATEGORY_DIM does not exist in load target. A DDL will be created.
 SCOTT.SUB_DEPT_DIM does not exist in load target. A DDL will be created.
 SCOTT.SUB_EMP_DIM does not exist in load target. A DDL will be created.
 SCOTT.SUB_EMP_SALARY_RANGE_DIM does not exist in load target. A DDL will be created.
 SCOTT.SUB_ITEM_DIM does not exist in load target. A DDL will be created.
 SCOTT.SUB_ITEM_PRICE_RANGE_DIM does not exist in load target. A DDL will be created.
 SCOTT.SUB_PROJECT_DIM does not exist in load target. A DDL will be created.

Table Dependency Tree

SCOTT.SALE_DIM
 SCOTT.CATEGORY_DIM
 SCOTT.DEPT_DIM
 SCOTT.EMP_DIM
 SCOTT.EMP_SALARY_RANGE_DIM
 SCOTT.ITEM_DIM
 SCOTT.ITEM_PRICE_RANGE_DIM
 SCOTT.PROJECT_DIM

Loader: ODBC
Vendor: Oracle
Provider: Oracle
Host: pathogen:1522
Instance: ORA12
User: scott
Schema: SCOTT

User Profiles

Anyone doing DB testing, app development, stress-testing, or benchmarking, including:

- Developers (programmers)
- DBAs and DW (ETL) architects
- Analysts and consultants

Use Cases

Bank of Montreal

- Generates safe, realistic 20GB Oracles tables with RI for query testing

MasterCard Peru

- Synthesizes PAN and PII in files to support OLTP and app testing

Transitive UK

- Simultaneously creates and transforms data to test cross-OS virtualization

Key Differentiators

1. [Big data](#) generation and population performance
(embedded CoSort pre-sorting engine speeds bulk loads)
2. Synthetic data that's broader and safer than real data via multiple methods:
<https://www.iri.com/blog/data-protection/making-realistic-test-data-production>
3. *Concurrent* test data manipulation (transformation) and custom report outputs
4. Simple, portable, and modifiable test data generation and auto-built
DB loader scripts, all managed visually in Eclipse, and easily integrated
Into TDM pipelines and products (see next slide)
5. Metadata compatibility with IRI DDF, erwin SmartConnectors, and MIMB:
to facilitate test data generation for 3rd-party BI, CRM, and ETL tools

What's New in RowGen

Recently Added	Development Underway
Ability to generate Data Vault test data	Random direct DB column lookups
New email, CCN and NID generators	Target support for Parquet, et al
Output to Excel sheets and ASN.1 files	Provisioner for Splunk test data
Integration with Windocks and VL TDH	KNIME node test data integration



IRI offers four methods for producing safe, intelligent test data in referentially correct database, flat-file, semi-structured file, and formatted report targets:



1. Production data **masking/scrambling** in IRI FieldShield or IRI Voracity
2. Database **subsetting** & masking in FieldShield or Voracity
3. Synthetic **test data** creation (via random generation/selection) in RowGen or Voracity
4. A **combination** of the above techniques in Voracity

TDaaS & TDM Options

1. Test Data as a Service (TDaaS), a remotely provided professional engagement leveraging RowGen or any of the data masking and subsetting features described above to provide highly customized test data without licensing or learning new technology.
2. Run IRI CLI jobs in CI/CD pipelines like Jenkins, GitLab, Azure DevOps, etc.
3. Run IRI jobs with these DB virtualization tools, which call our scripts at cloning time:
 - a. [Actifio](#)
 - b. [Commvault](#)
 - c. [Windocks](#)
4. On-demand TDM web apps are tightly integrated with IRI software too, including:
 - a. Cigniti BlueSwan
 - b. ValueLabs Test Data Hub (TDH)

Modernizing lower-level DB environments

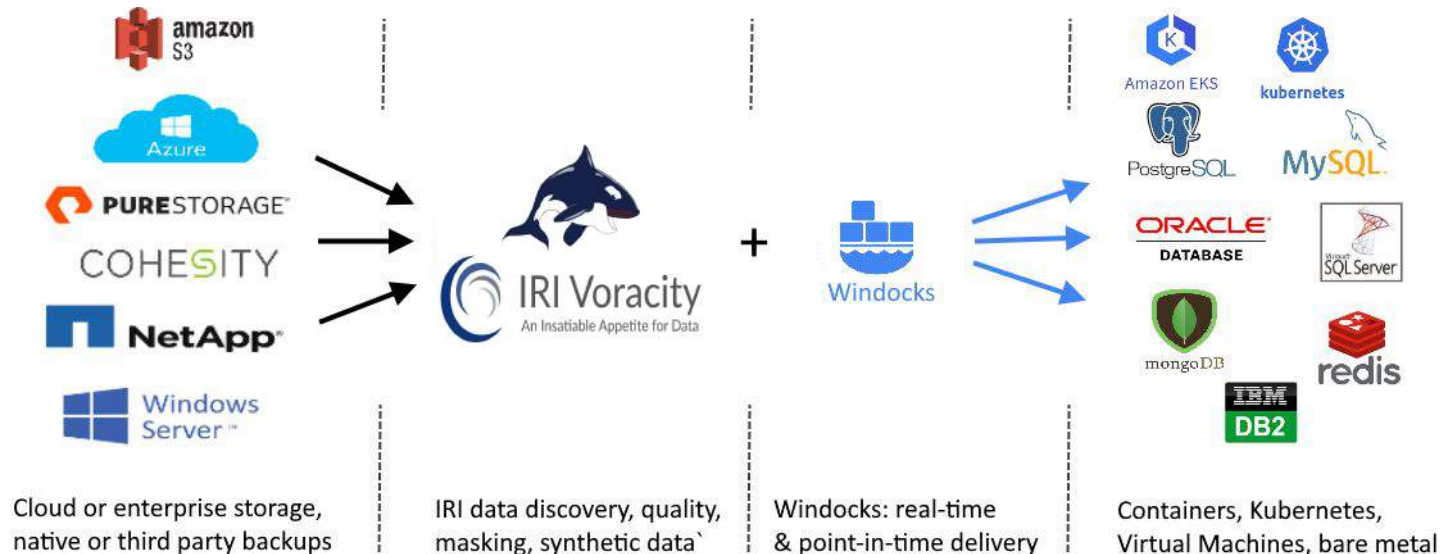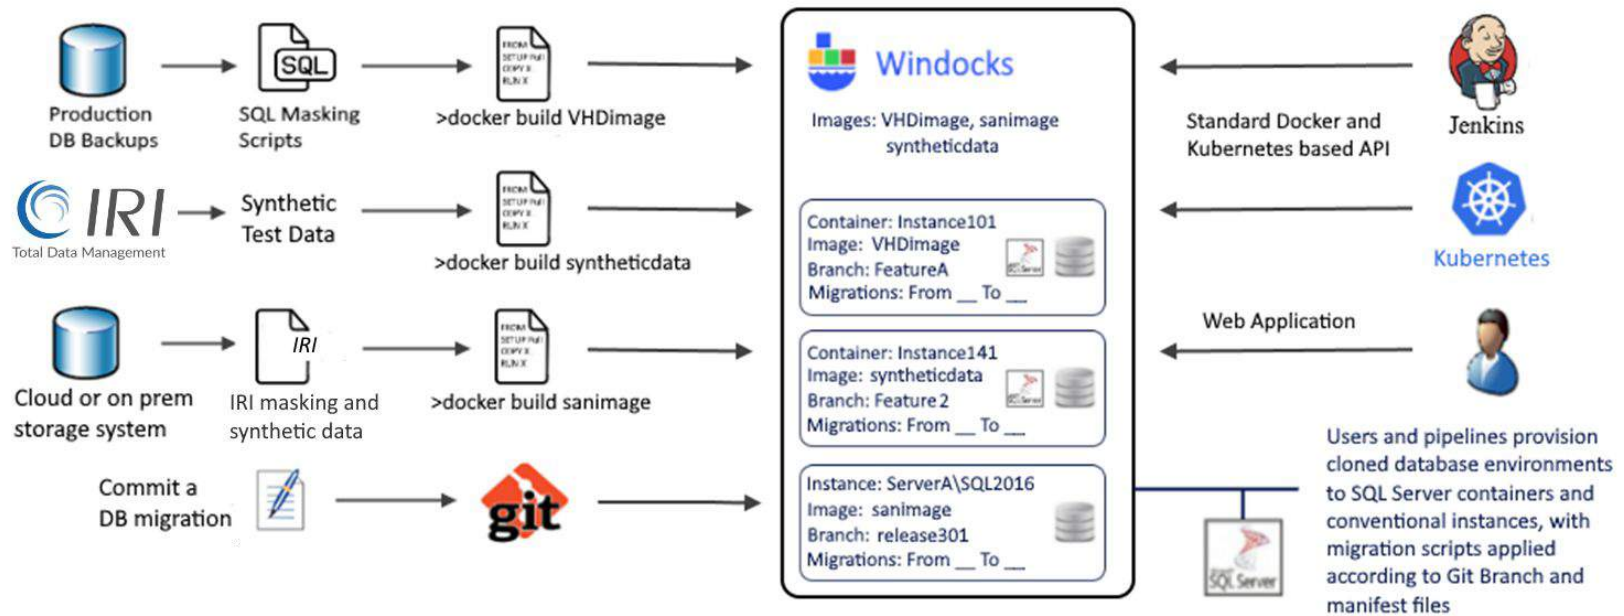

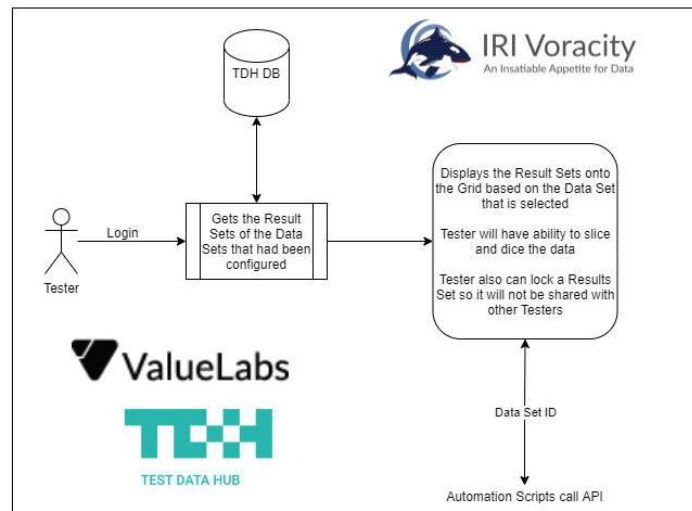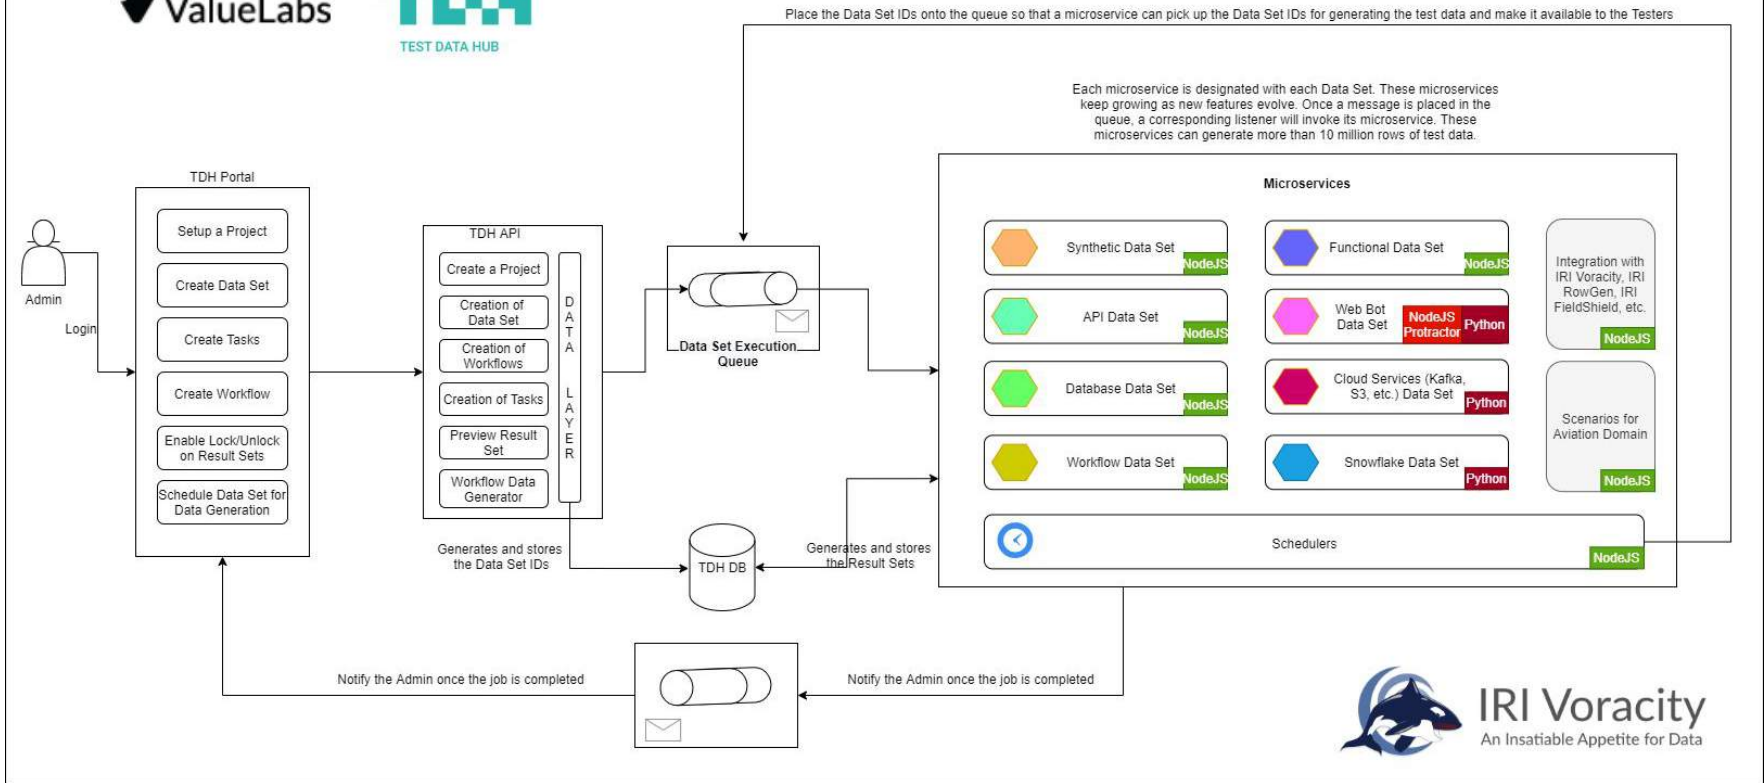



Learn and Share

[IRI Data Masking Solutions](#)

[Data Masking How-to Articles](#)

[LinkedIn Data Masking Group](#)

[IRI Mask/Test Tech Talk Videos](#)

[IRI Test Data Solutions](#)

[Test Data How-to Articles](#)

[LinkedIn Test Data Group](#)

[Voracity Platform Resources](#)

